

## 2300-2500MHz/50Watts/Module

Model Number: KN2400M47A

The model KN2400M47A is a high power amplifier operating between 2.3GHz and 2.5GHz and offering a wide dynamic Range with 50Watts typical saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency.

**FEATURES:**

- Narrowband & High power;
- High Efficiency;
- Great Linearity;
- Small Size & Light Weight;
- Low Distortion

**ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω**

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2.3		2.5	GHz
RF Output Power @Psat	Psat		50		Watt
Power Gain	Gp		47		dB
Power Gain Flatness	Δ Gp		±1.5		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @30W	H		-30		dBc
Spurious Signals	Spur		-55		dBc
Switch On/Off@10-90% Time	TON/OFF		2		μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	24	28	32	Volt
DC Current @50W	IDD		8		Amp

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Notes
Dimensions	150x90x25 [5.9x3.55x0.98]	mm [inch]	Maximum
Weight	1.5 [3.3]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-40		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

**ABSOLUTE MAXIMUM RATING**

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =20W	5:1 @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

### Focus on Your Application

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com  
without notice

Specifications subject to change


## 2300-2500MHz/50Watts/Module

Model Number: KN2400M47A

### DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1,2	VDD	28V <sub>DC</sub>
3,4	GND	Ground
5	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
6	CURRENT MONITOR	Analog voltage relative to I <sub>DD</sub> @ 100mV per Ampere
7	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
8	NC	
9	NC	

### OUTLINE DRAWING (All dimensions in mm [inch])

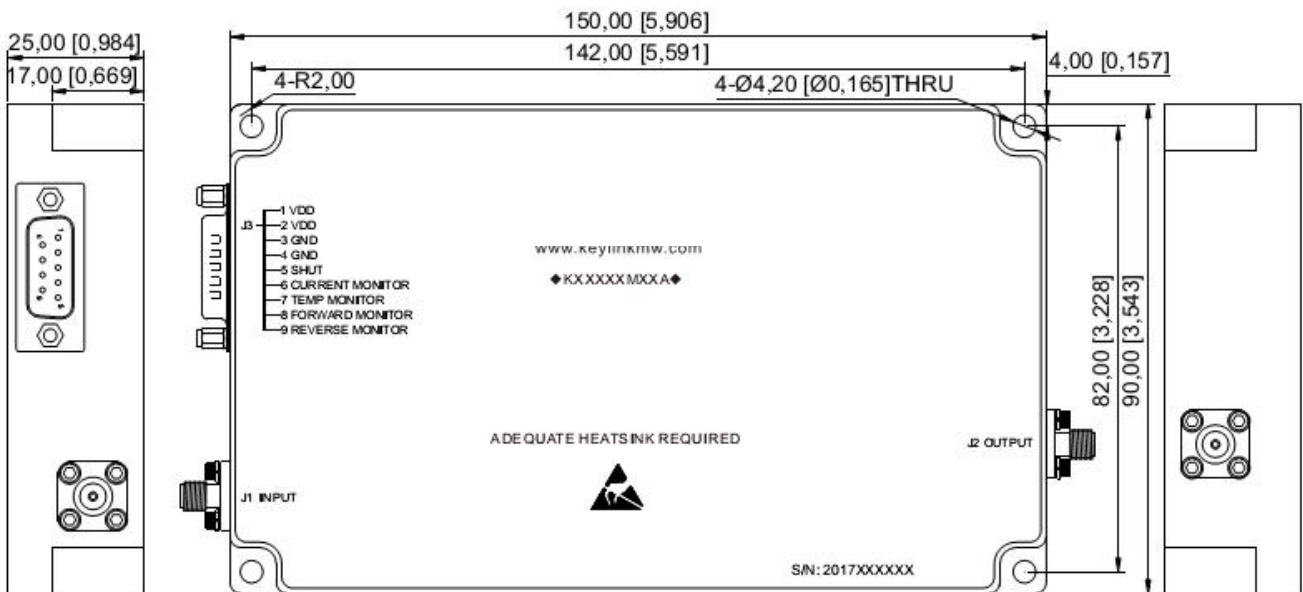

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> sales@keylinkmw.com >> www.keylinkmw.com  
without notice

Specifications subject to change

**2300-2500MHz/50Watts/Module**

Model Number: KN2400M47A

**TYPICAL PERFORMANCE PLOTS**

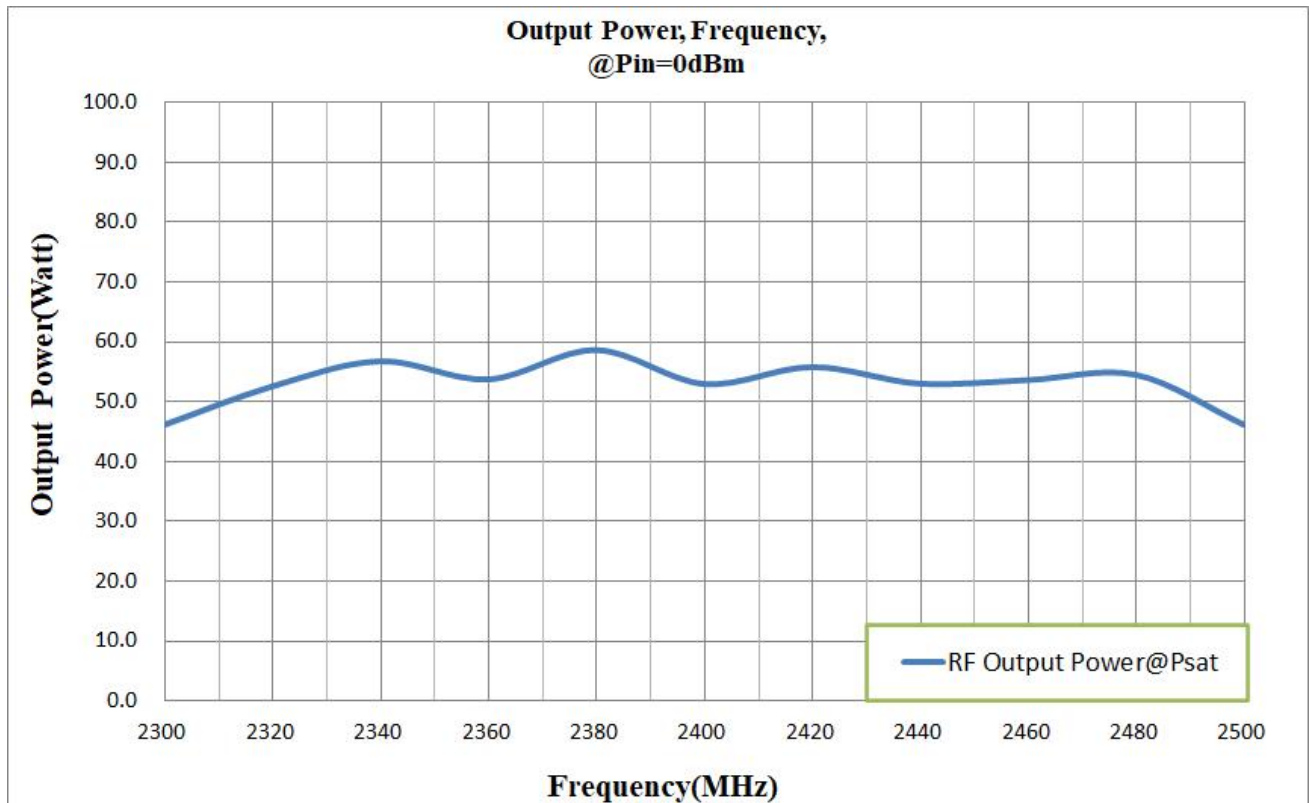

**Note:** Adequate heatsink required.

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

without notice

Specifications subject to change