

2.4-2.5GHz/200Watt/Module

Model Number: KN2450M53A

The model KN2450M53A is a narrowband high power amplifier operating between 2.4GHz and 2.5GHz and offering a dynamic range with 200 Watts typical saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency.

FEATURES:

- Narrowband & High power
- High Efficiency
- Small Size & Light Weight
- Built-In Control and Protection Circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2.4		2.5	GHz
RF Output Power @Psat	Psat		200		Watt
Power Gain	Gp		53		dB
Power Gain Flatness	Δ Gp		±1.0		dB
Input Return Loss	S11		-15	-10	dB
Harmonics @150W	H		-30		dBc
Spurious Signals	Spur		-60		dBc
Switch On/Off@10-90% Time	TON/OFF		2		μs
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC		28		Volt
DC Current @200W	IDD		24		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	170x130x30 [6.69x5.12x1.18]	mm [inch]	Maximum
Weight	2.0 [4.4]	kg [lbs]	Maximum
RF Connector Input	SMA, Female		
RF Connector Output	Type-N, Female		
DC Interface Connector	Hybrid, D-Sub 7 Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)	5		95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =100W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


2.4-2.5GHz/200Watt/Module

Model Number: KN2450M53A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28VDC
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	GND	Ground
5	GND	Ground

OUTLINE DRAWING (All dimensions in mm [inch])

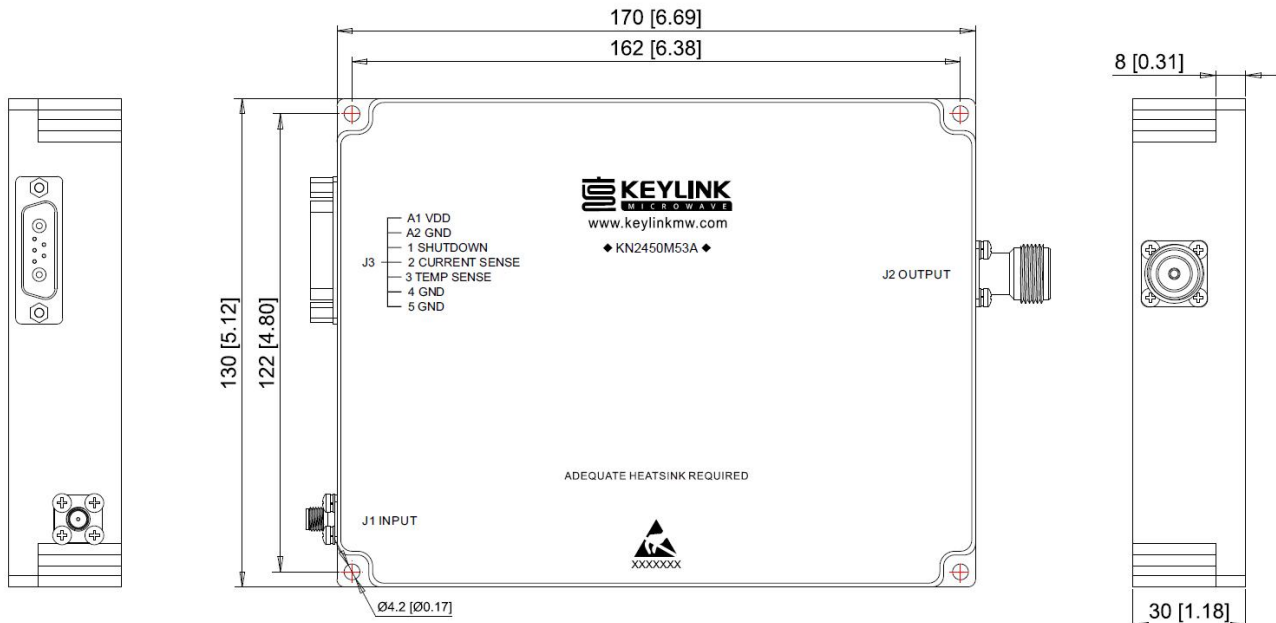

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

2.4-2.5GHz/200Watt/Module

Model Number: KN2450M53A

TYPICAL PERFORMANCE PLOTS

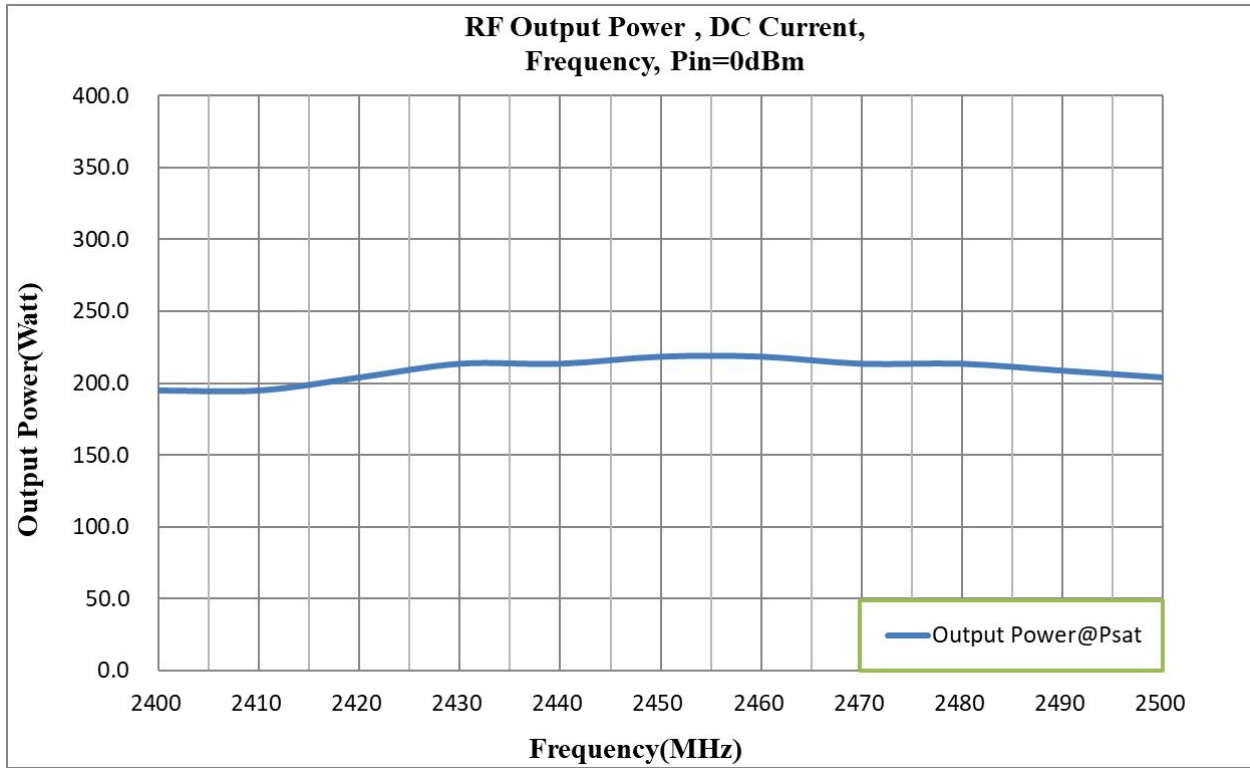

Note: Adequate heatsink required.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice