

## 1.5-30MHz/200Watt/Module

Model Number: KB0001003M53A

The model KB0001003M53A is a high power amplifier operating between 1.5MHz and 30MHz and offering a wide dynamic Range with 200 Watts typical saturated power. The employment of LDMOS and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

**FEATURES:**

- Small Size and light weight
- Instantaneous ultra-broadband
- 50 Ohms input and Output matched
- Built-in control and protection circuits.

**ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	1.5		30	MHz
RF Output Power	P <sub>out</sub>		200		Watt
Power Gain	G		53		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @100W	H		-10		dBc
Spurious Signals	Spur		-60		dBc
In/Output Impedance			50		Ω
Operating Voltage	V <sub>DC</sub>	24	28	32	Volt
DC Current @200W	I <sub>DD</sub>		15		Amp

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Limits
Dimensions	200x150x30 [7.5x5.9x1.2]	mm [inch]	Maximum
Weight	2 [4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	N-Typ, Female		
DC Interface Connector	Hybrid,D-Sub 7-Pin,Male		
Cooling	External Heatsink (Not Supplied)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

**Absolute Maximum Rating**

Input RF drive level without	+10dBm	Maximum
Load VSWR @ POUT =100W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous	
Thermal Overload	85°C shutdown	Maximum

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

&gt;&gt; 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

&gt;&gt; Phone: +86(28)87870761\*8708 &gt;&gt; Fax: +86(28)87883266

&gt;&gt; Email: sales@keylinkmw.com &gt;&gt; www.keylinkmw.com

Specifications subject to change without notice


1.5-30MHz/200Watt/Module

Model Number: KB0001003M53A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28VCC
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT MONITOR	Analog voltage relative to I <sub>DD</sub> @ 100mV per Ampere
3	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	GND	Ground
5	NC	No electrical connection

OUTLINE DRAWING (All dimensions in mm)

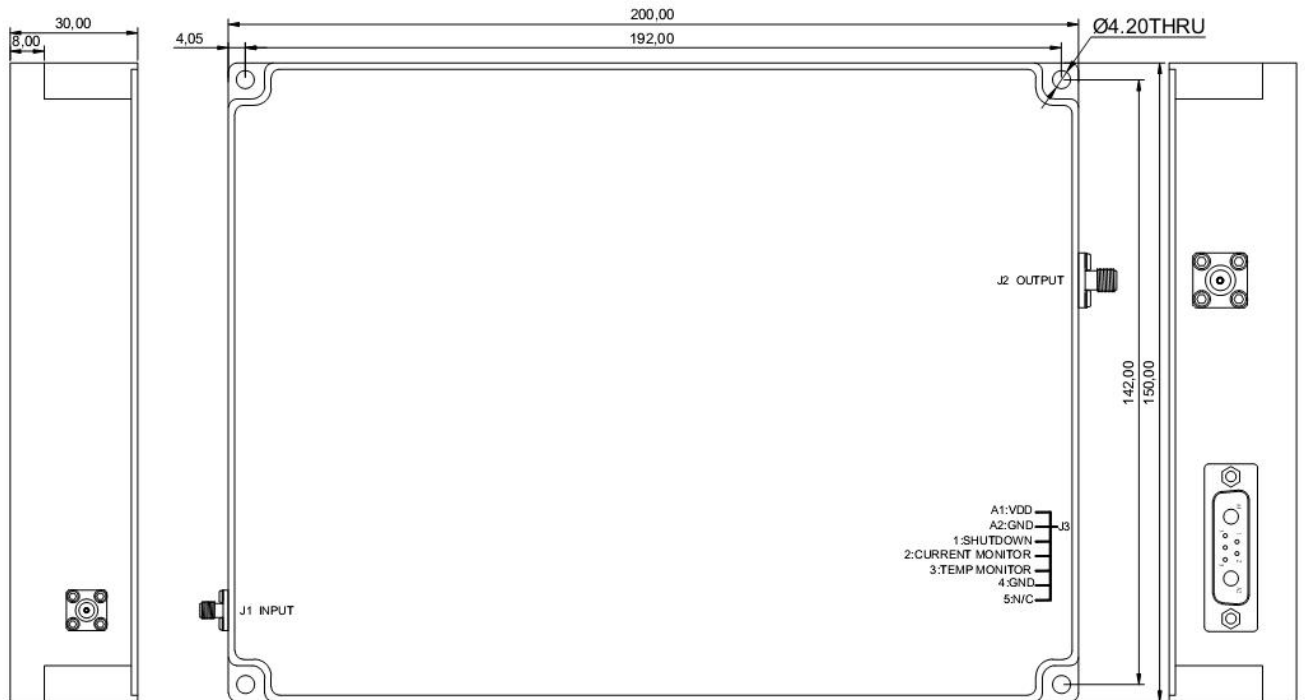

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


*Specifications subject to change without notice*

1.5-30MHz/200Watt/Module


Model Number: KB0001003M53A

TYPICAL PERFORMANCE PLOTS

Graph1: Output Power (Low temp.-20±3°C)

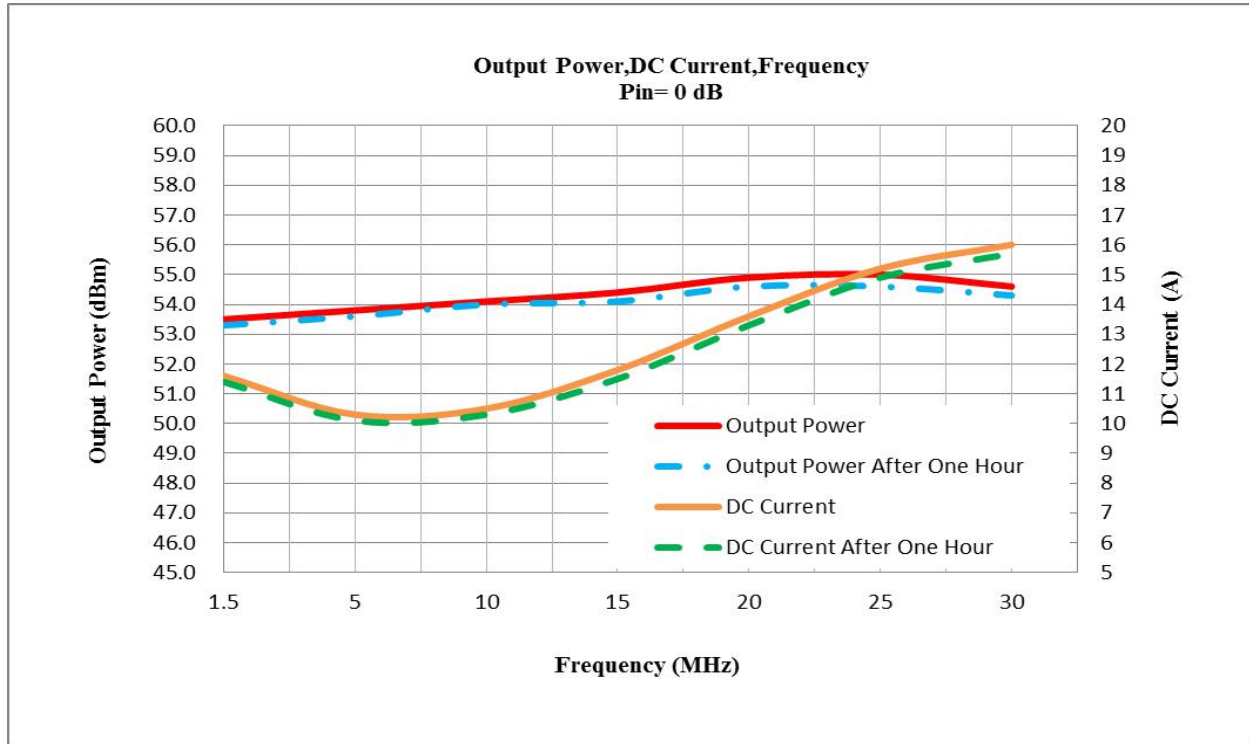

Graph2: Output Power (High temp. +60±3°C)

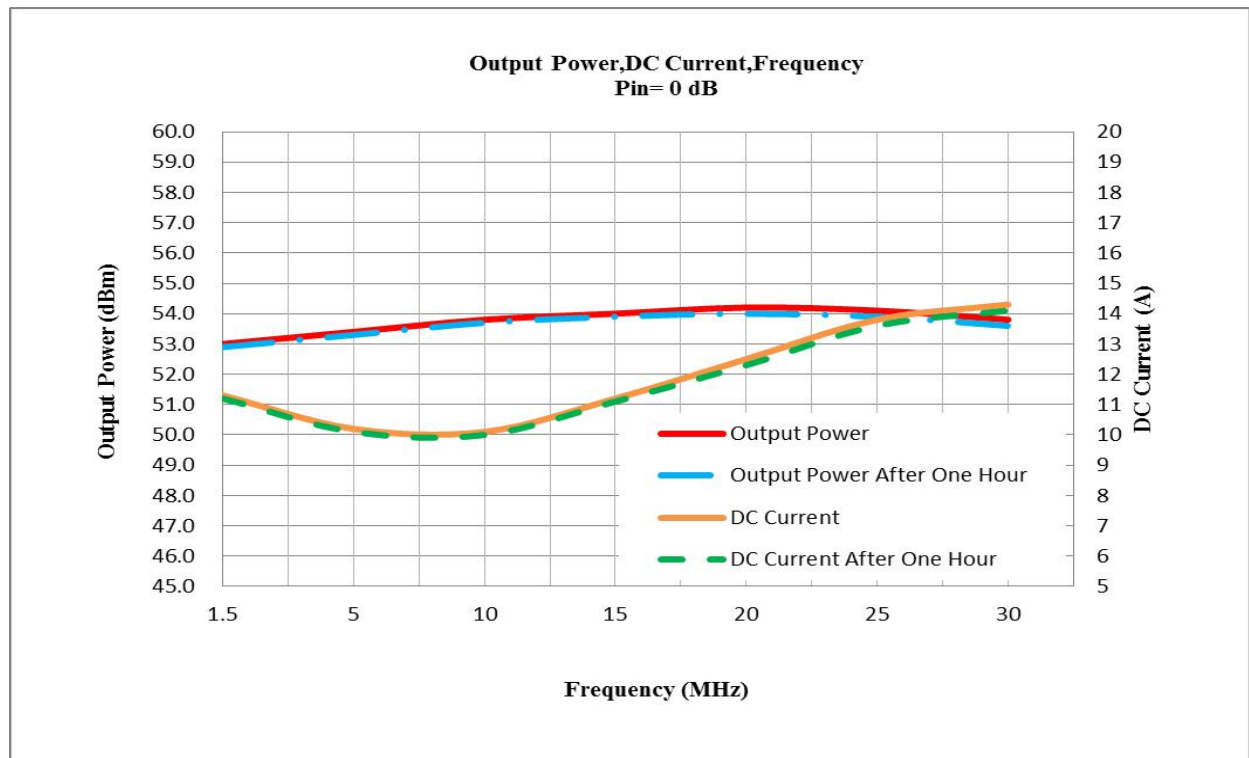

Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


1.5-30MHz/200Watt/Module

Model Number: KB0001003M53A

Graph3: Output Power(Normal temp.+25±3°C)

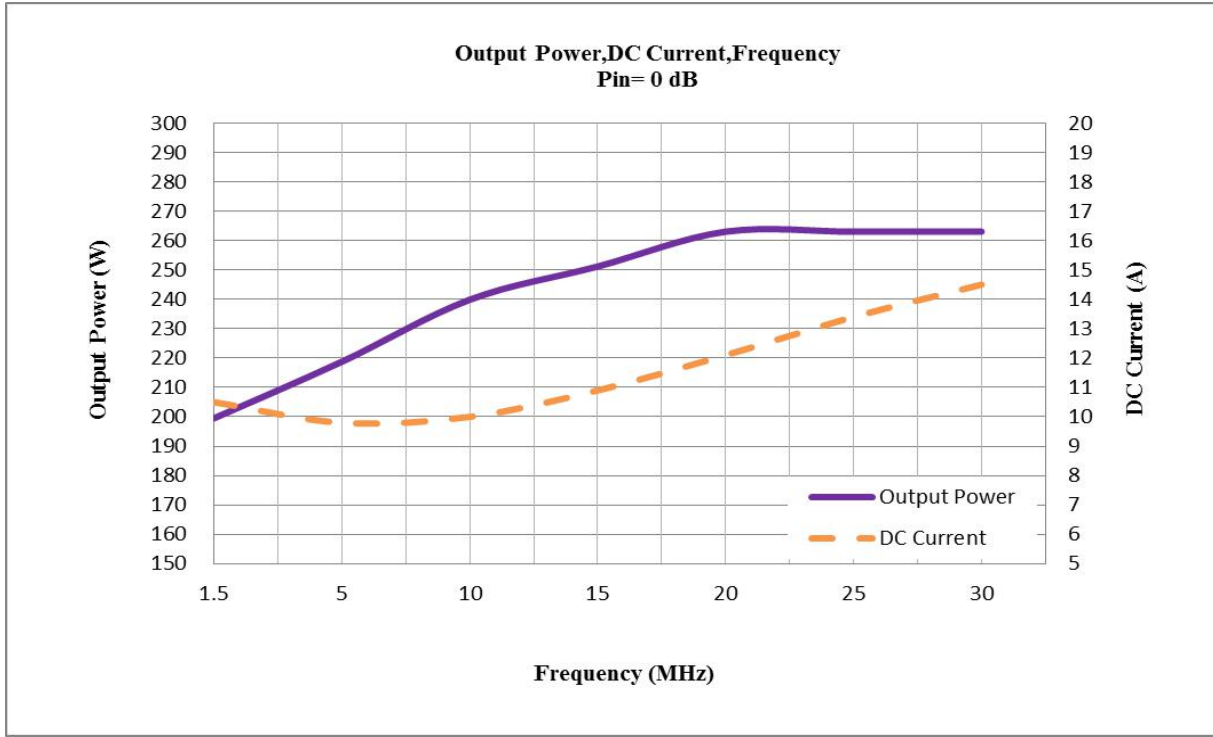

Power Gain:

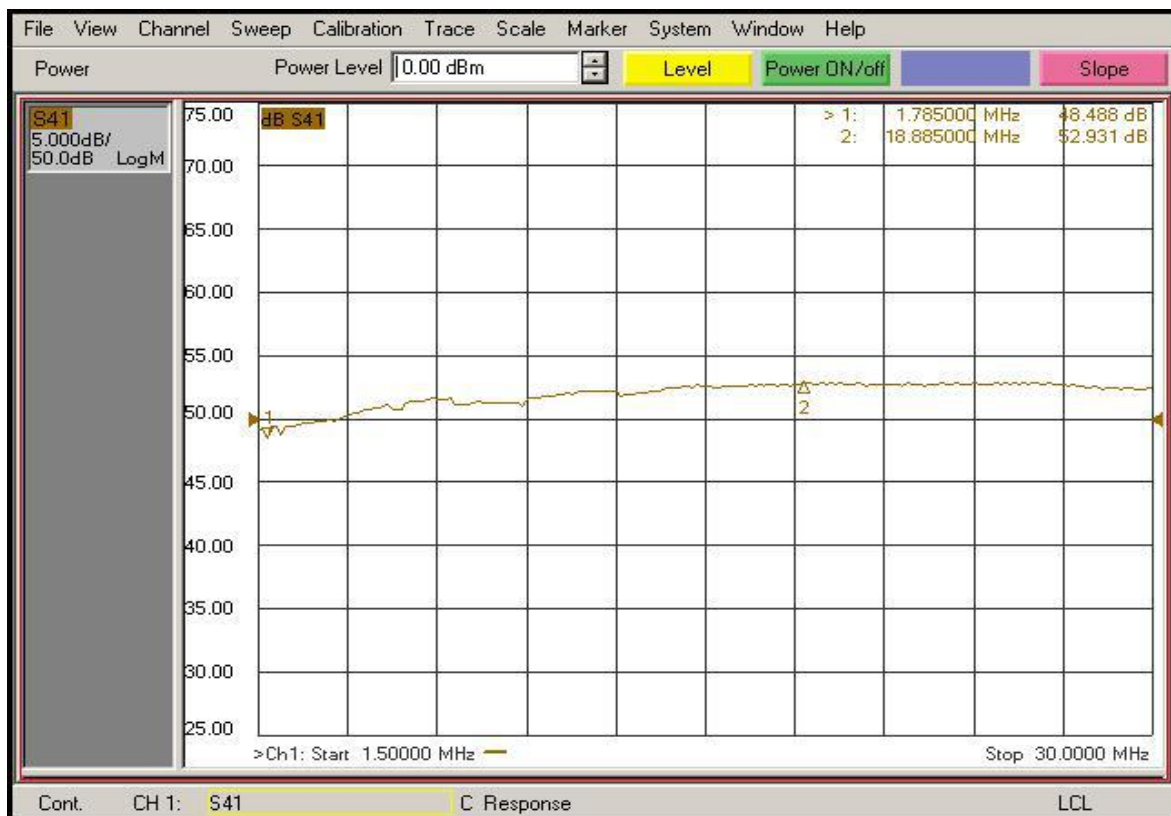

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*

### 1.5-30MHz/200Watt/Module

Model Number: KB0001003M53A

Input Return Loss:

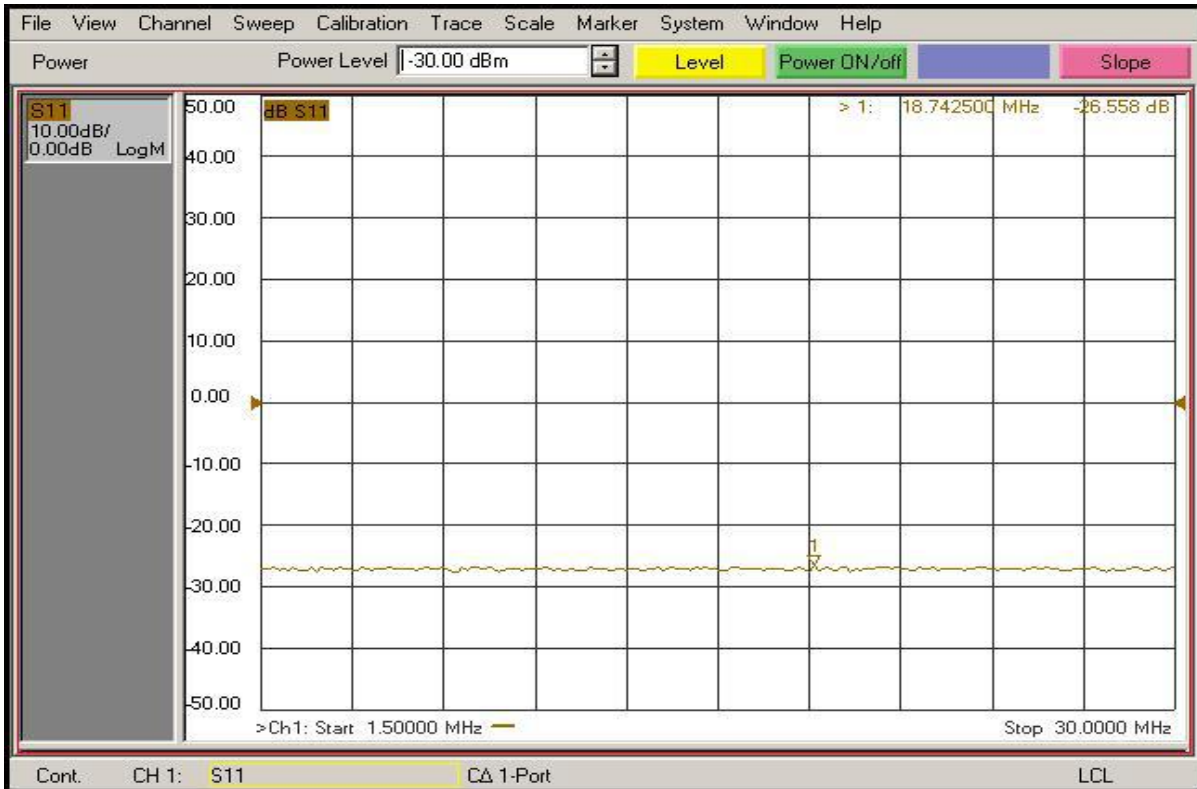

**Note:** Adequate heatsink required.

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*