

0.5-2.5GHz/100Watt/Module

Model Number: KB0525M50B

The model KB0525M50B is a multi-octave high power amplifier operating between 0.5 GHz and 2.5GHz and offering a wide dynamic Range with 100 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and light weight
- Instantaneous ultra-broadband
- 50 Ohms input and Output matched
- Built-in control and protection circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	500		2500	MHz
RF Output Power @PSAT	PSAT	60	100		Watt
Power Gain @PSAT	Gp		50		dB
Power Gain Flatness @PSAT	Δ Gp		± 2		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @70W	H		-10	-8	dBc
Spurious Signals @PSAT	Spur		-60		dBc
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	24	28	32	Volt
Power add efficiency	Eff		27		
DC Current @100W	I _{DD}		13		Amp
Switching Time @1kHz TTL	Ton/off		5		uS

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	180x90x25 [7.08x3.54x0.98]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heat sink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ POUT =50W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C Graceful Degradation

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


0.5-2.5GHz/100Watt/Module

Model Number: KB0525M50B


DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	VDD	28VDC
2	VDD	28VDC
3	VDD	28VDC
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V)(Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to I _{DD} @100mV per Ampere
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

Functional Diagram

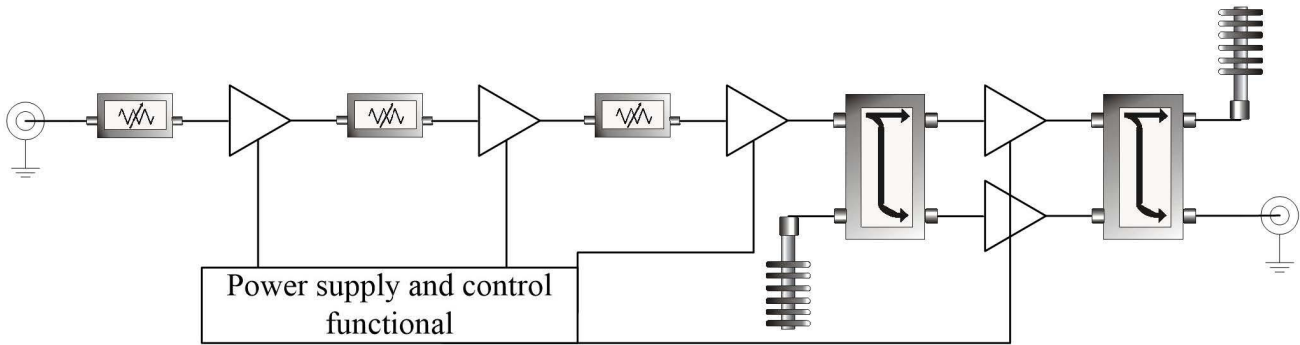

OUTLINE DRAWING (All dimensions in mm [inch])

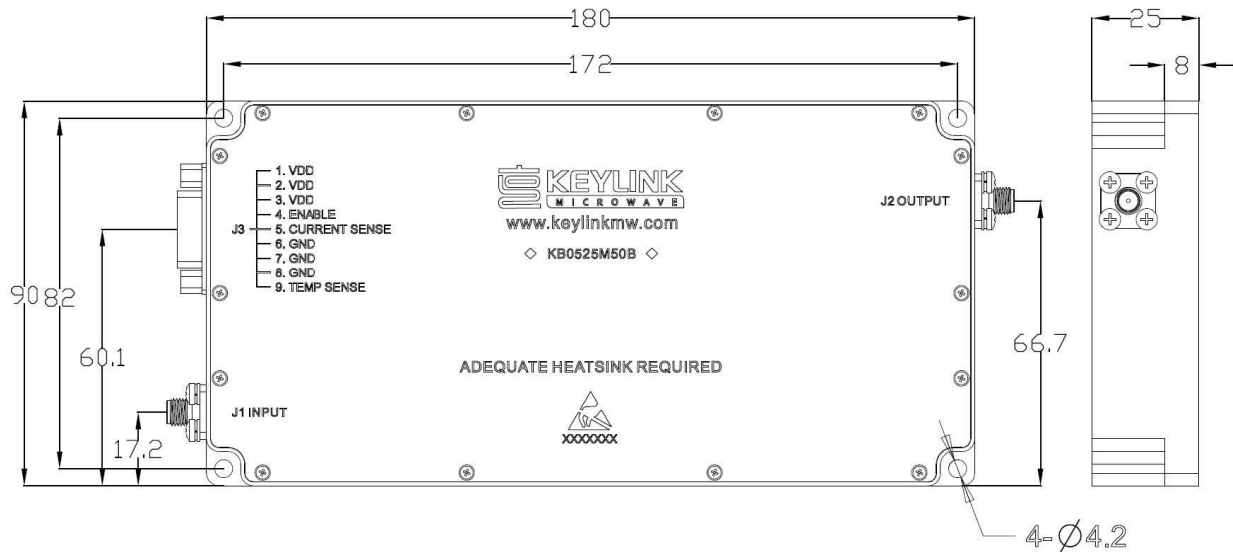

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


Specifications subject to change without notice

0.5-2.5GHz/100Watt/Module


Model Number: KB0525M50B

TYPICAL PERFORMANCE PLOTS(For reference only)

Graph1: Output Power (Low temp. -20±3°C)

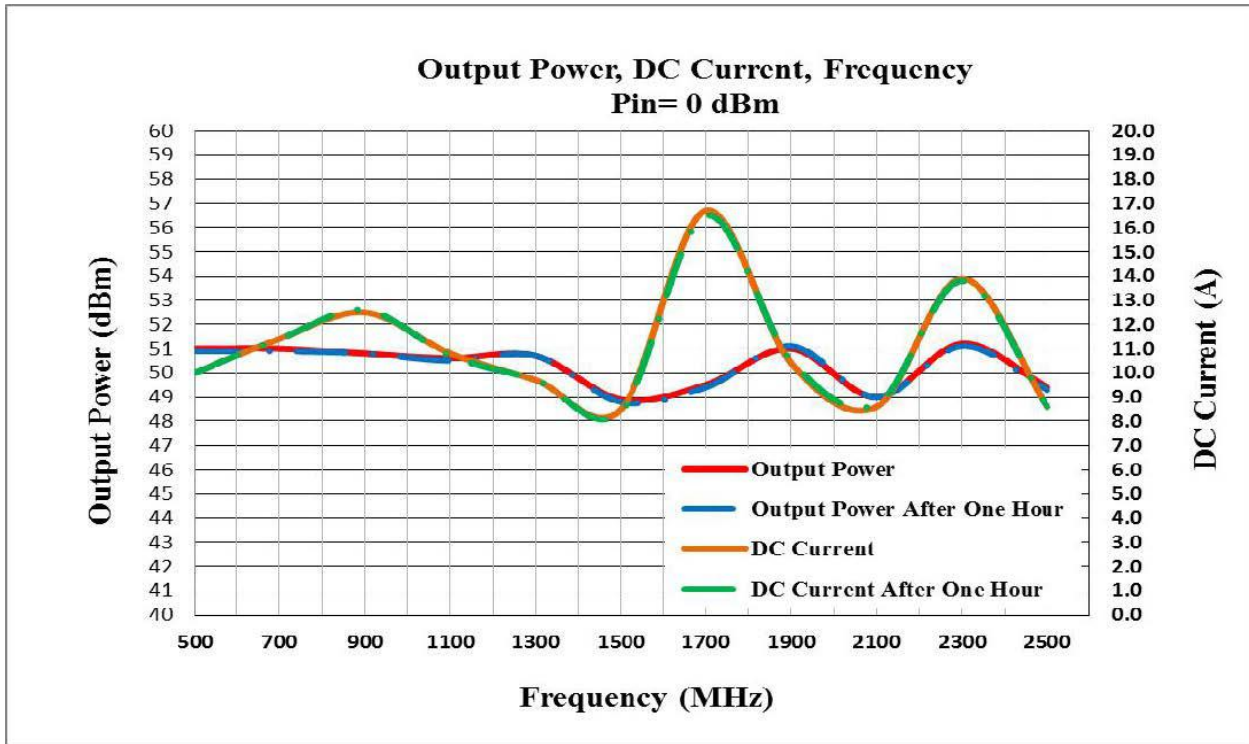

Graph2: Output Power (High temp. +55±3°C)

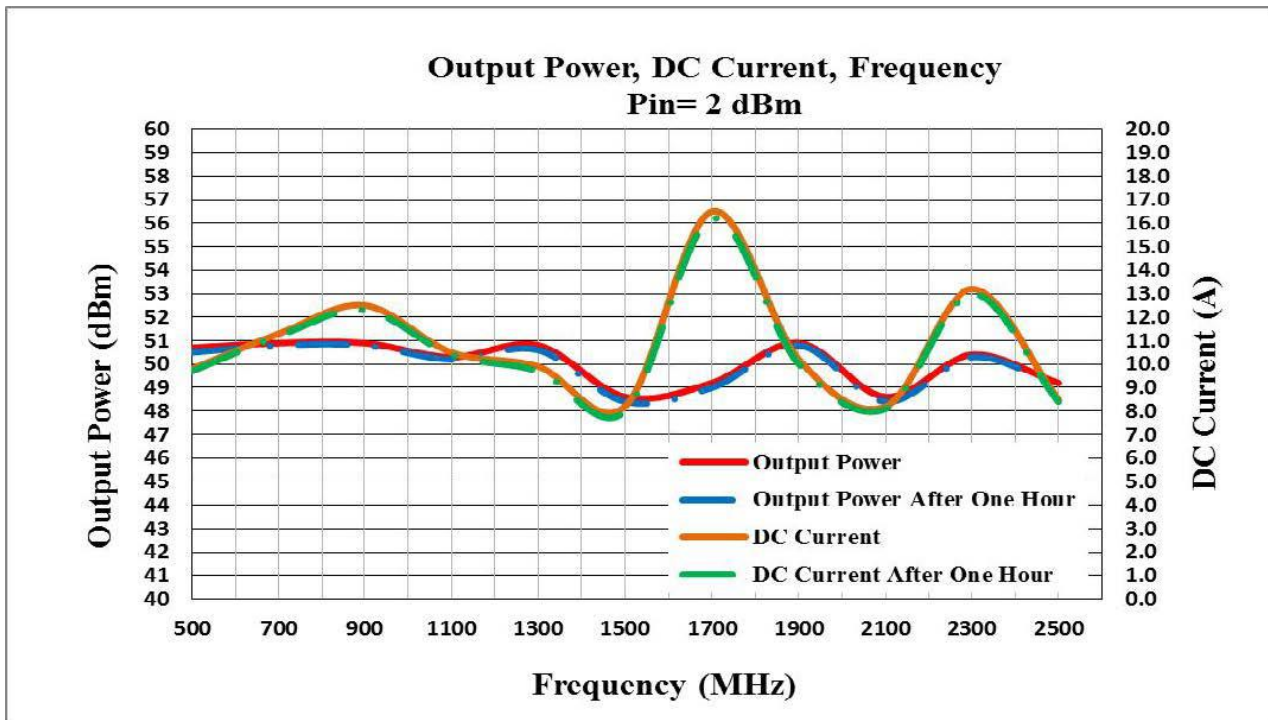

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


0.5-2.5GHz/100Watt/Module

Model Number: KB0525M50B

Graph3: Output Power (Normal temp. +25±3°C)

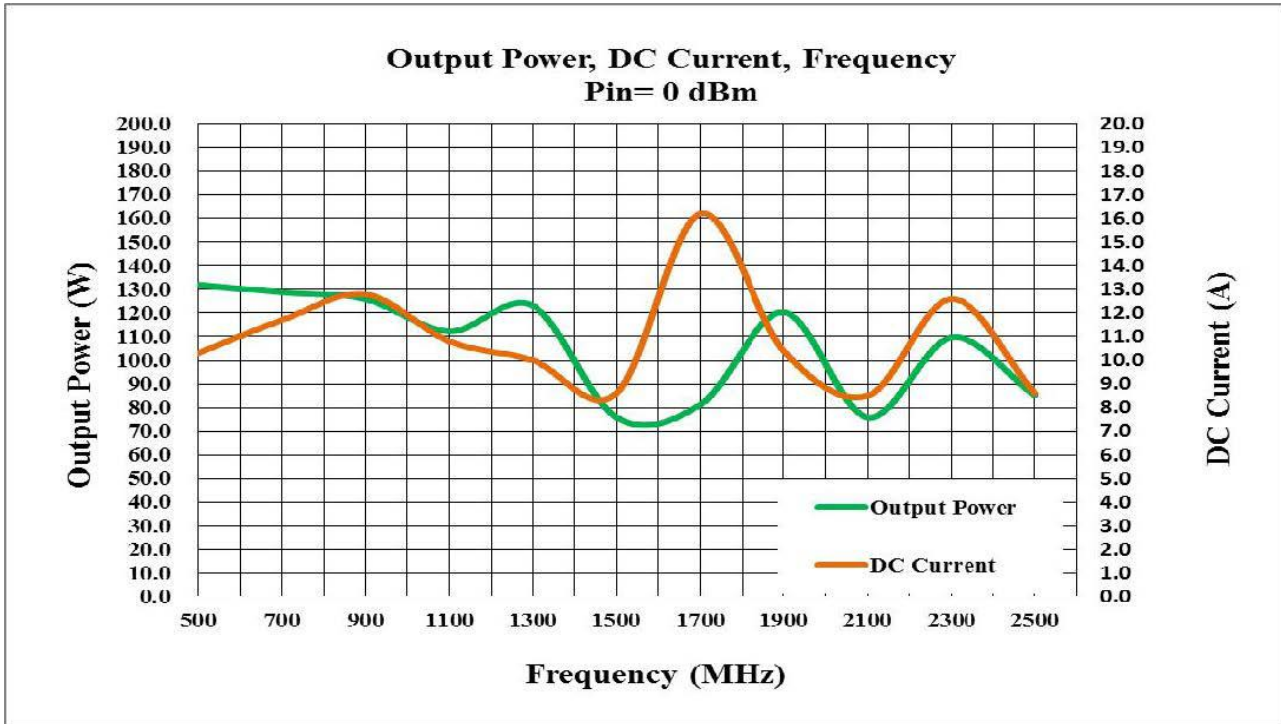

Power Gain:

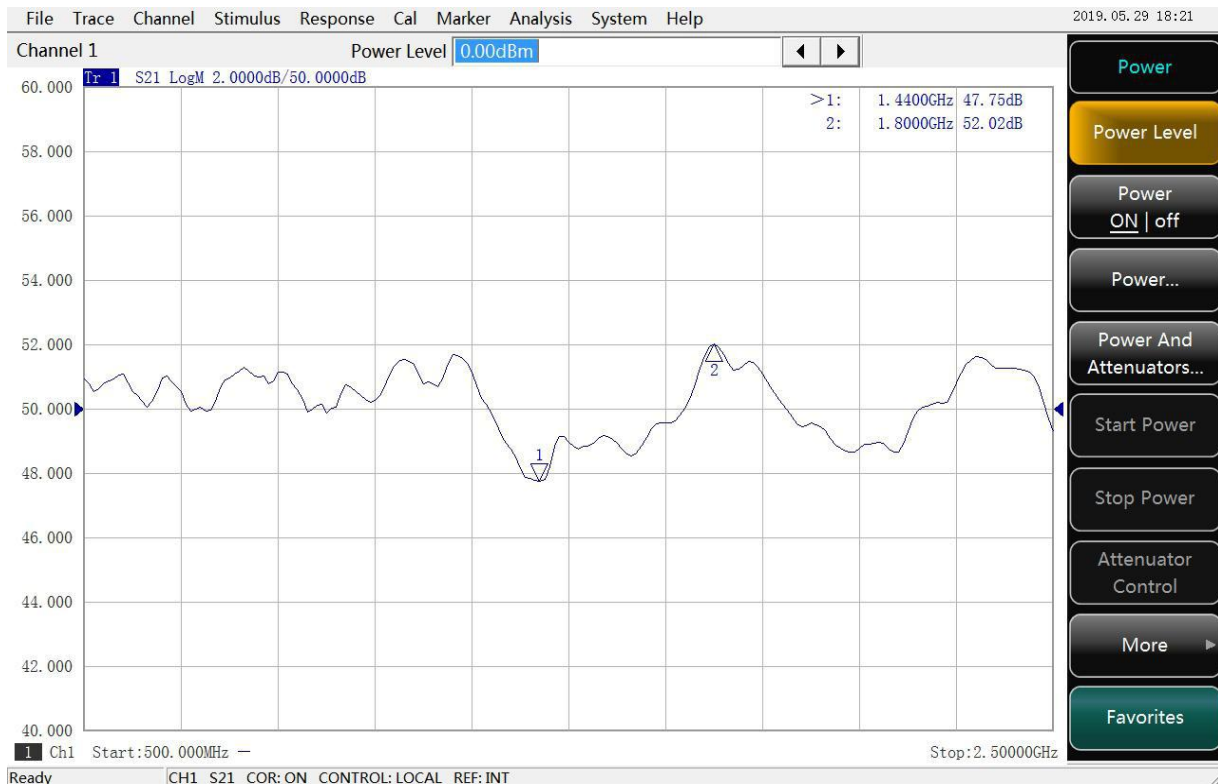

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

0.5-2.5GHz/100Watt/Module

Model Number: KB0525M50B

Input Return Loss:

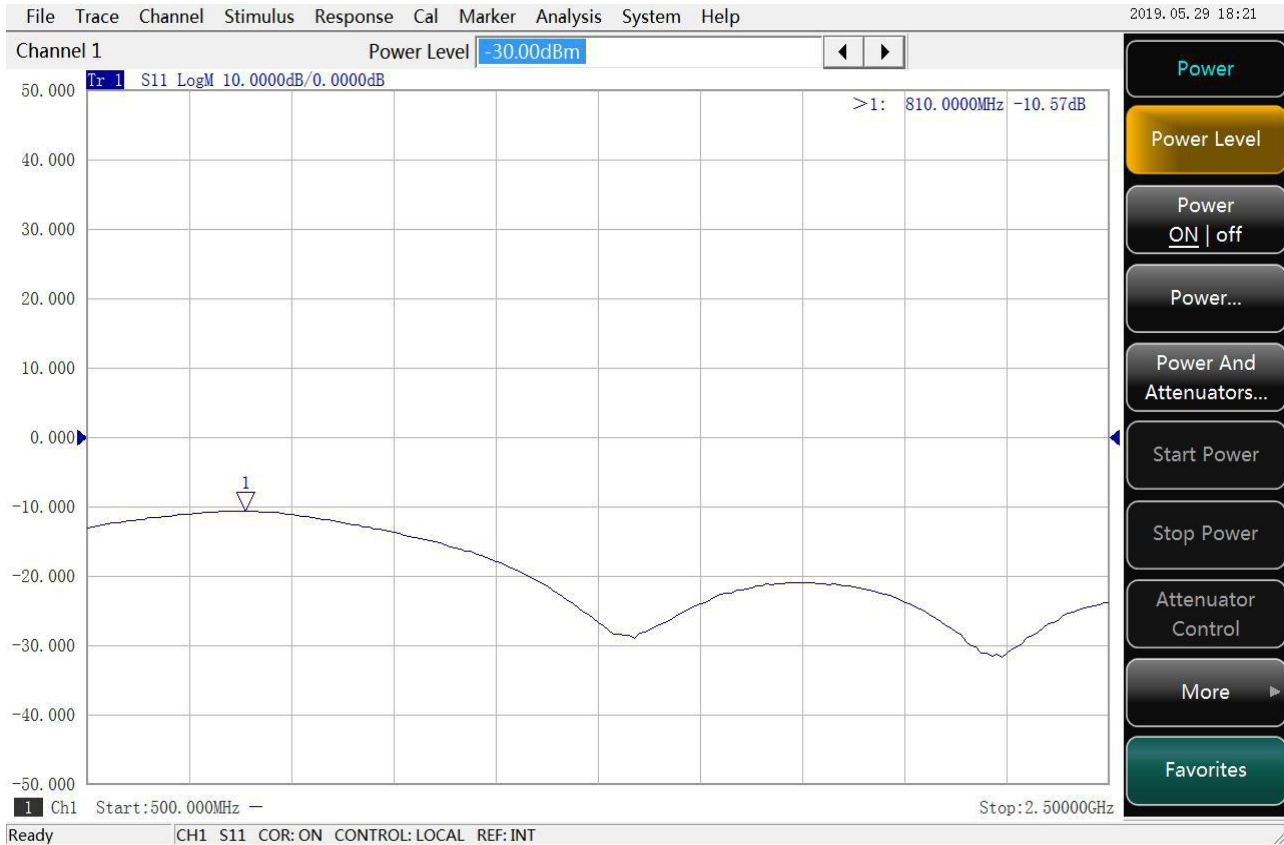

Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice