

0.7-2.7GHz/80Watt/Module

Model Number: KB0727M49A

The model KB0727M49A is a multi-octave high power amplifier operating between 0.7 GHz and 2.7GHz and offering a wide dynamic Range with 80 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and light weight;
- Instantaneous ultra broadband;
- 50 Ohms input and Output matched;
- Built-in control and protection circuits.

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	700		2700	MHz
RF Output Power @PSAT	PSAT		80		Watt
Power Gain	Gp		49		dB
Power Gain Flatness	Δ Gp		±2.5		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @60W	H		-10		dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{dc}	24	28	32	Volt
DC Current @70W	I _{DD}		13		Amp
Switching Time @1kHz TTL	T _{on/off}		5		uS

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	180x90x25 [7.08x3.54x0.0.98]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		55	°C	
Non-operating Temperature	-25		60	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =60W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

DC INTERFACE CONNECTOR

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


Specifications subject to change without notice

0.7-2.7GHz/80Watt/Module

Model Number: KB0727M49A

Pin #	Description	Specifications
1	VDD	28V _{DC}
2	VDD	28V _{DC}
3	VDD	28V _{DC}
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to Module's Current @ 100 mV/A
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

OUTLINE DRAWING (All dimensions in mm [inch])

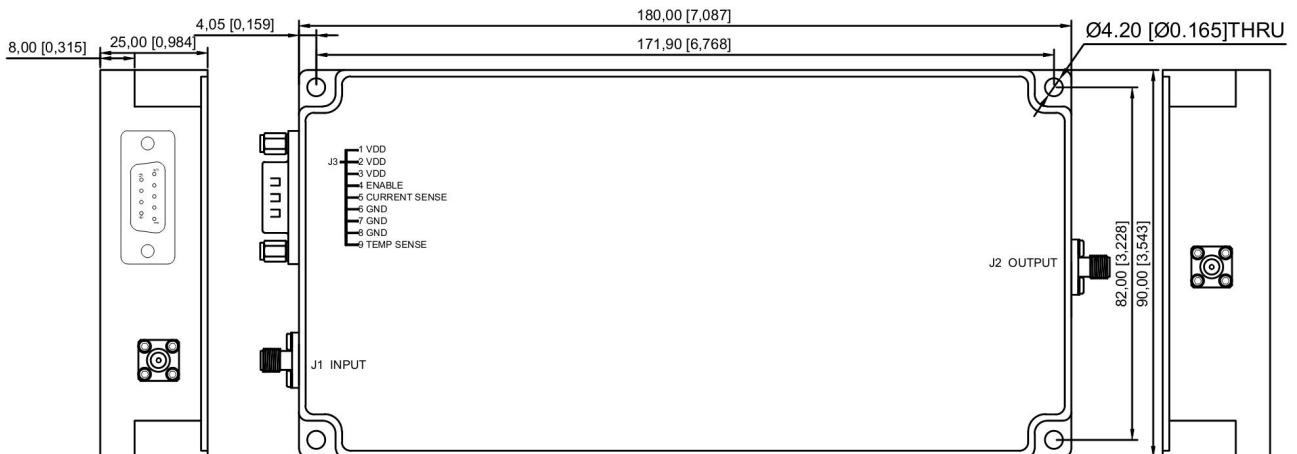

TYPICAL PERFORMANCE PLOTS (For reference only)

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China


>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

0.7-2.7GHz/80Watt/Module

Model Number: KB0727M49A

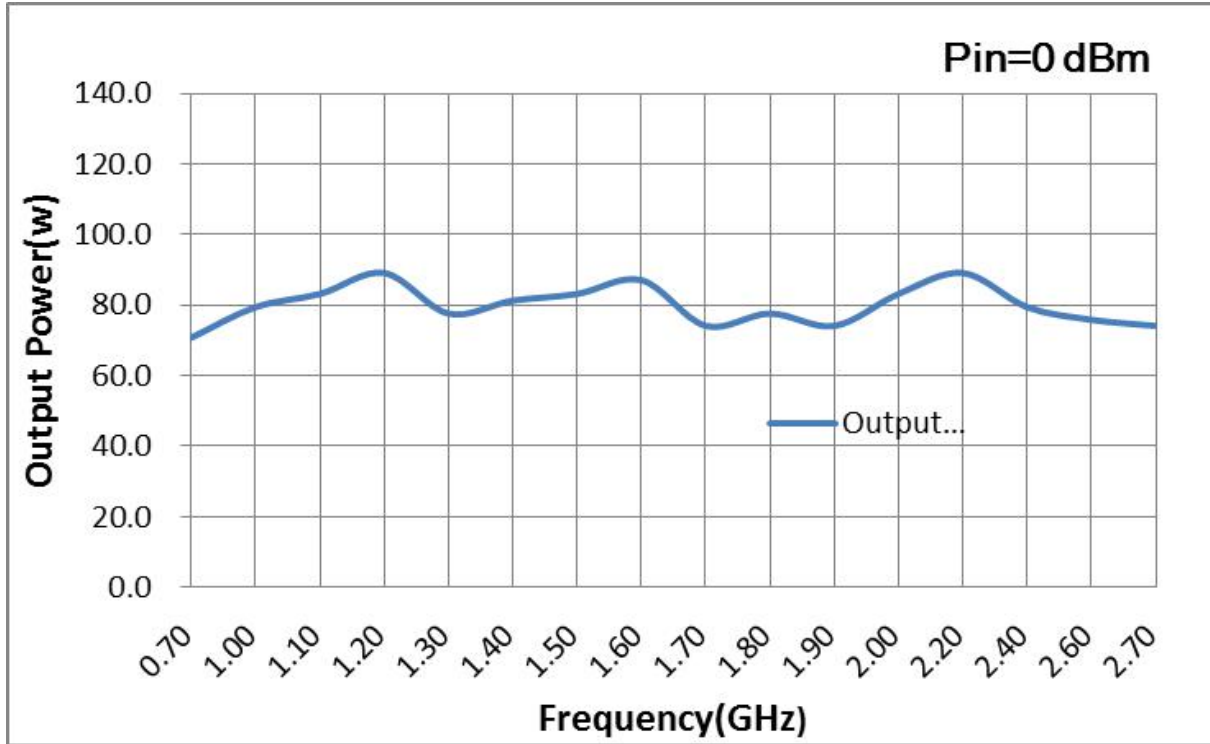

Note:

This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice