

## 800-4200MHz/50Watt/Module

Model Number: KB0842M47A

The model KB0842M47A is a multi-octave high power amplifier operating between 800 MHz and 4200 MHz and offering a wide dynamic Range with 50 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for multi octave broadband high power RF linear applications.

### FEATURES:

- Suitable for RF, L&S linear applications
- Small size and light weight
- Unconditional stability and ruggedness
- Built-in control, and protection circuits
- Class AB

### ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω system

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	800		4200	MHz
RF Output Power	Pout		50		Watt
Power Gain	Gp		47		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S11			-10	dB
Harmonics @20W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switching Speed	T <sub>ON/OFF</sub>		2	5	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V <sub>DC</sub>	24	28	32	Volt
Power add efficiency	Eff		23		%
Current Consumption @ P <sub>OUT</sub> = 40W	I <sub>DD</sub>			13	Amp

### MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	180x120x25 [7.08x4.72x0.98]	mm [inch]	Maximum
Weight	1.5[3.3]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

### ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

### Absolute Maximum Rating

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ P <sub>OUT</sub> =30W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous

*Focus on Your Application*

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice


800-4200MHz/50Watt/Module

Model Number: KB0842M47A


DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1,2,3	VDD	28Vdc
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
6,7,8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

Functional Diagram

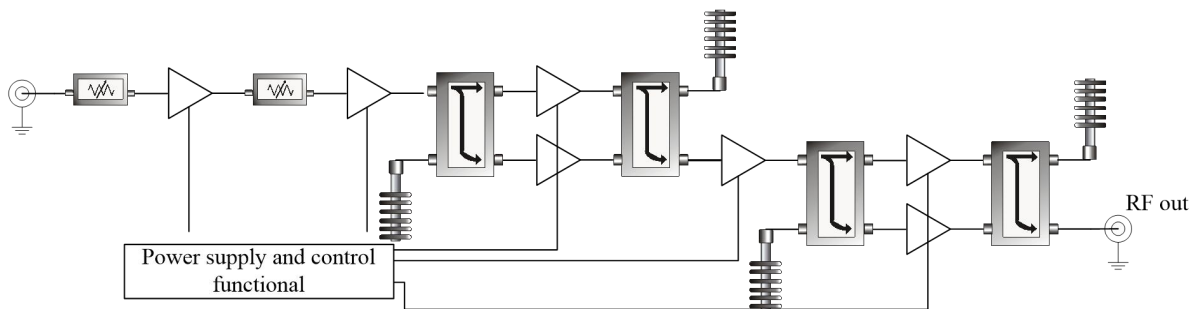

OUTLINE DRAWING (All dimensions in mm[inch])

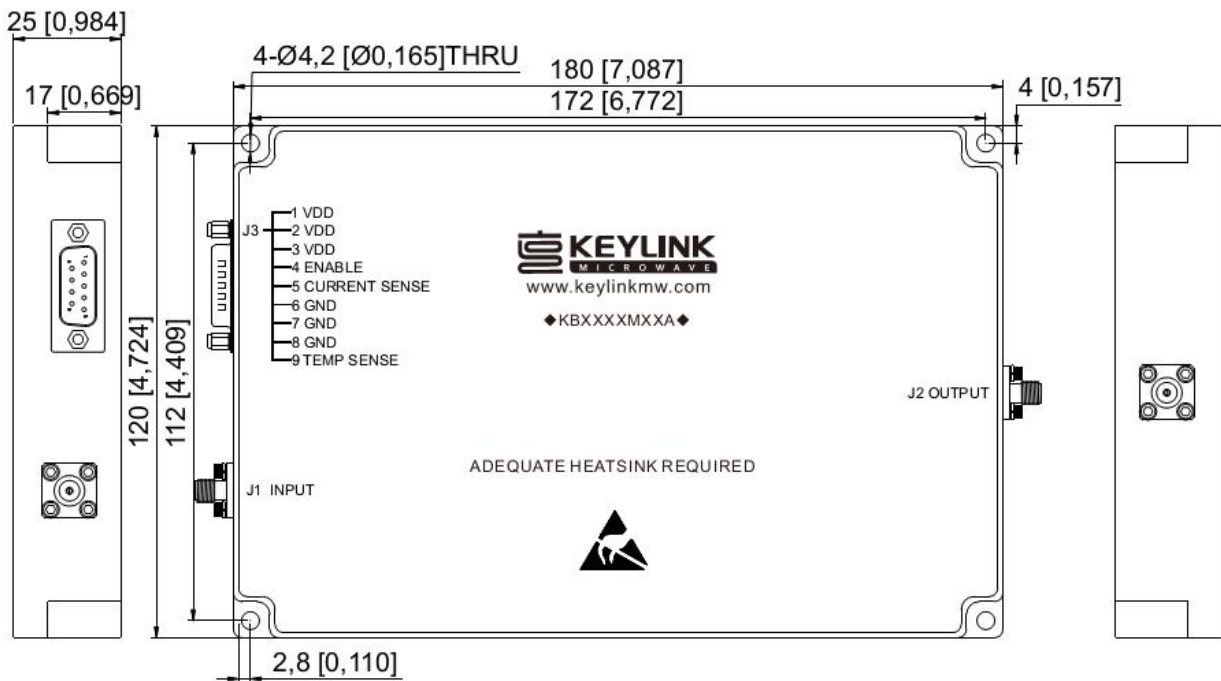

Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com


Specifications subject to change without notice

800-4200MHz/50Watt/Module


Model Number: KB0842M47A

TYPICAL PERFORMANCE PLOTS (for reference only)

Graph1: Output Power (Low temp. -20±3°C)

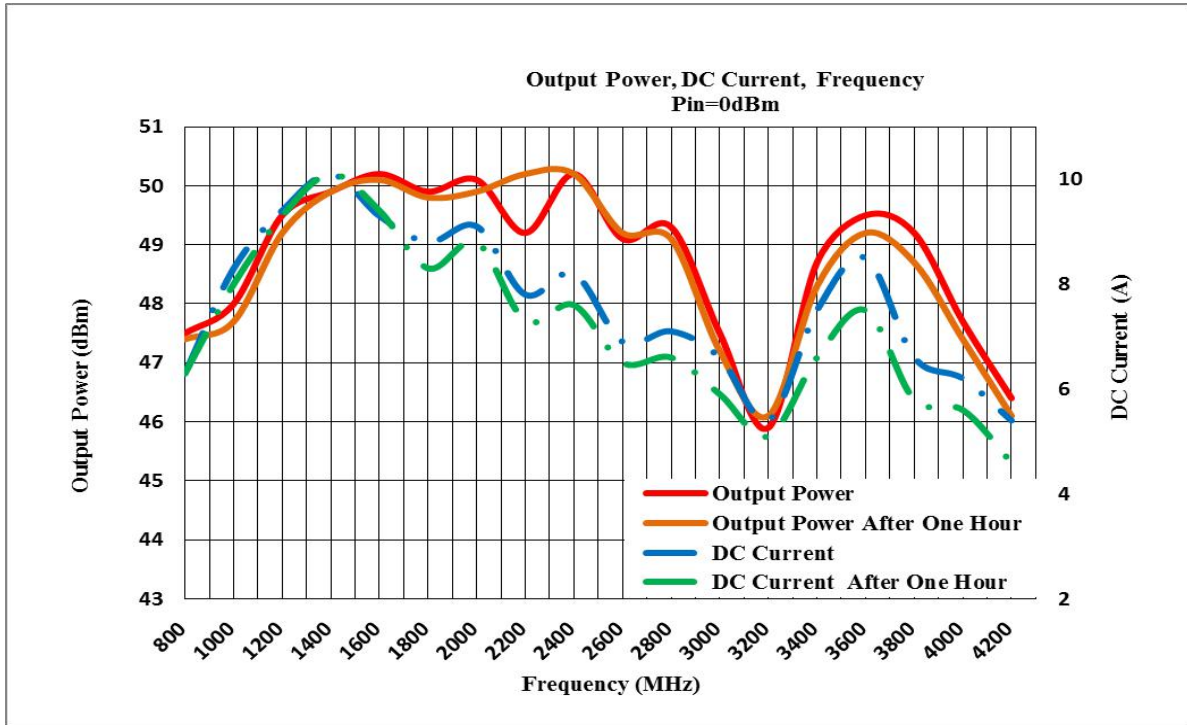

Graph2: Output Power (High temp. +60±3°C)

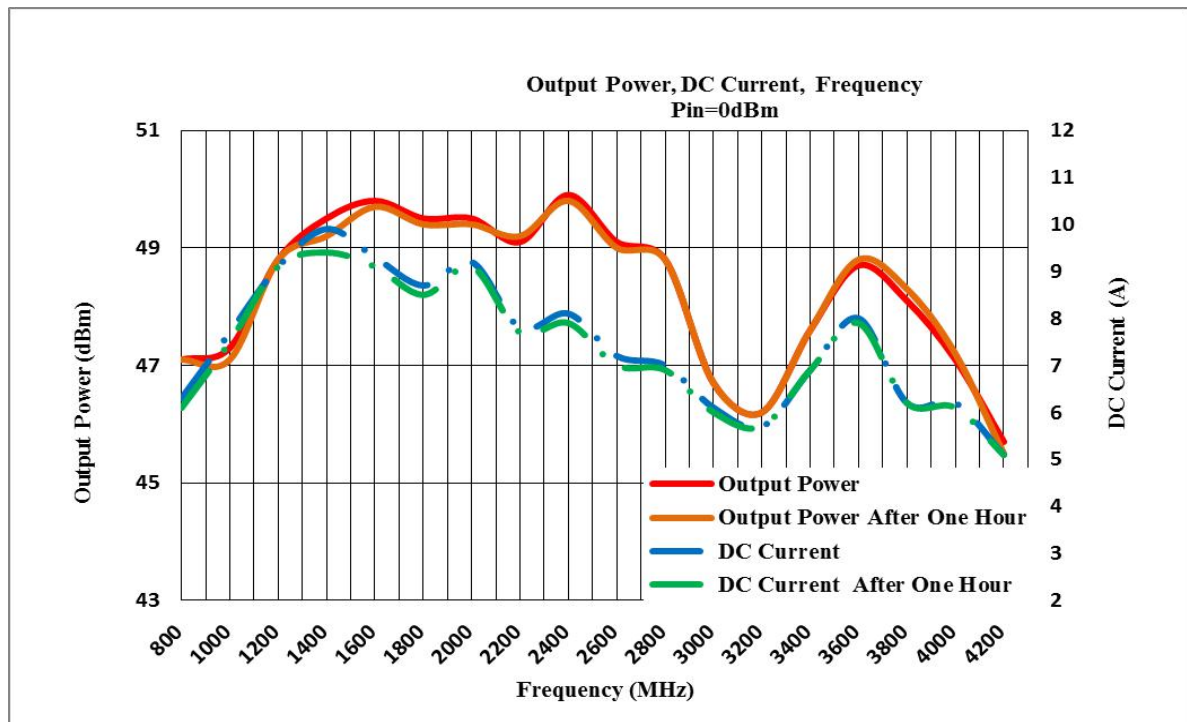

Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice


800-4200MHz/50Watt/Module

Model Number: KB0842M47A

Graph3: Output Power (Normal temp. +25±3°C)

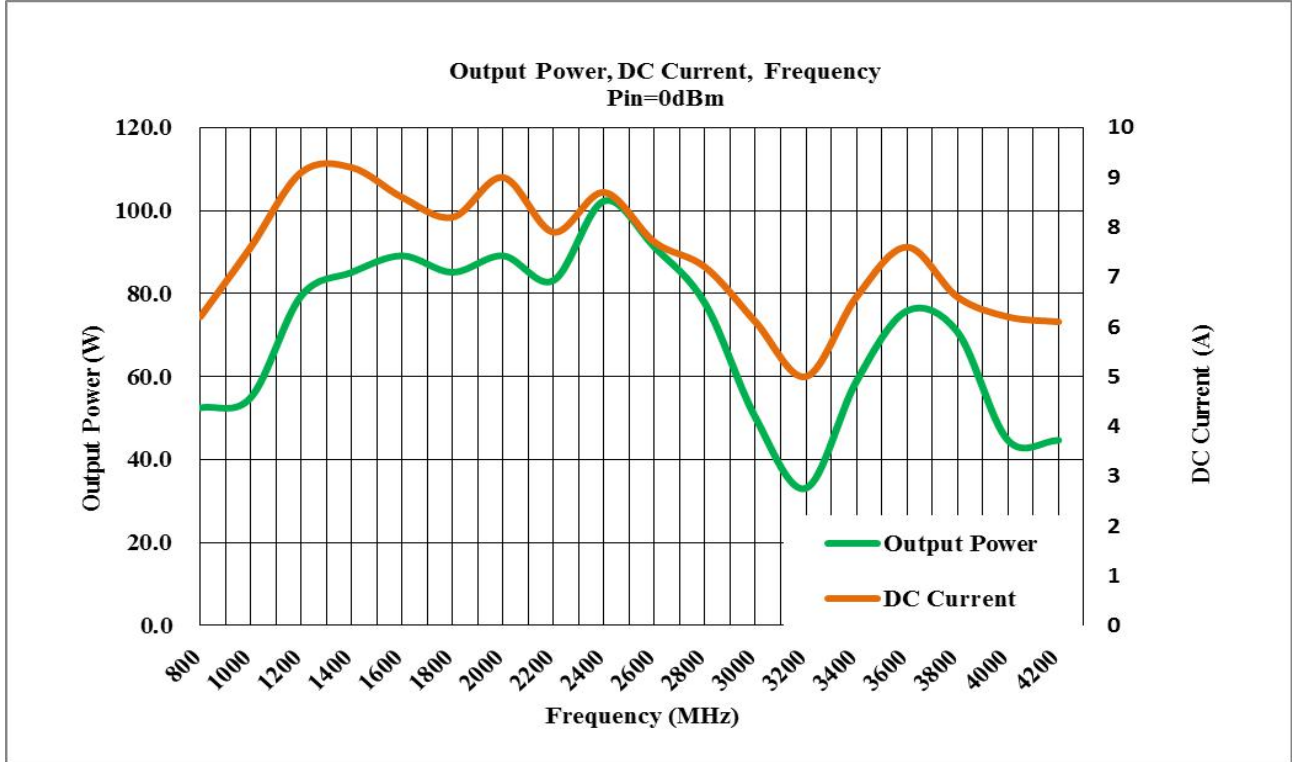

Power Gain:

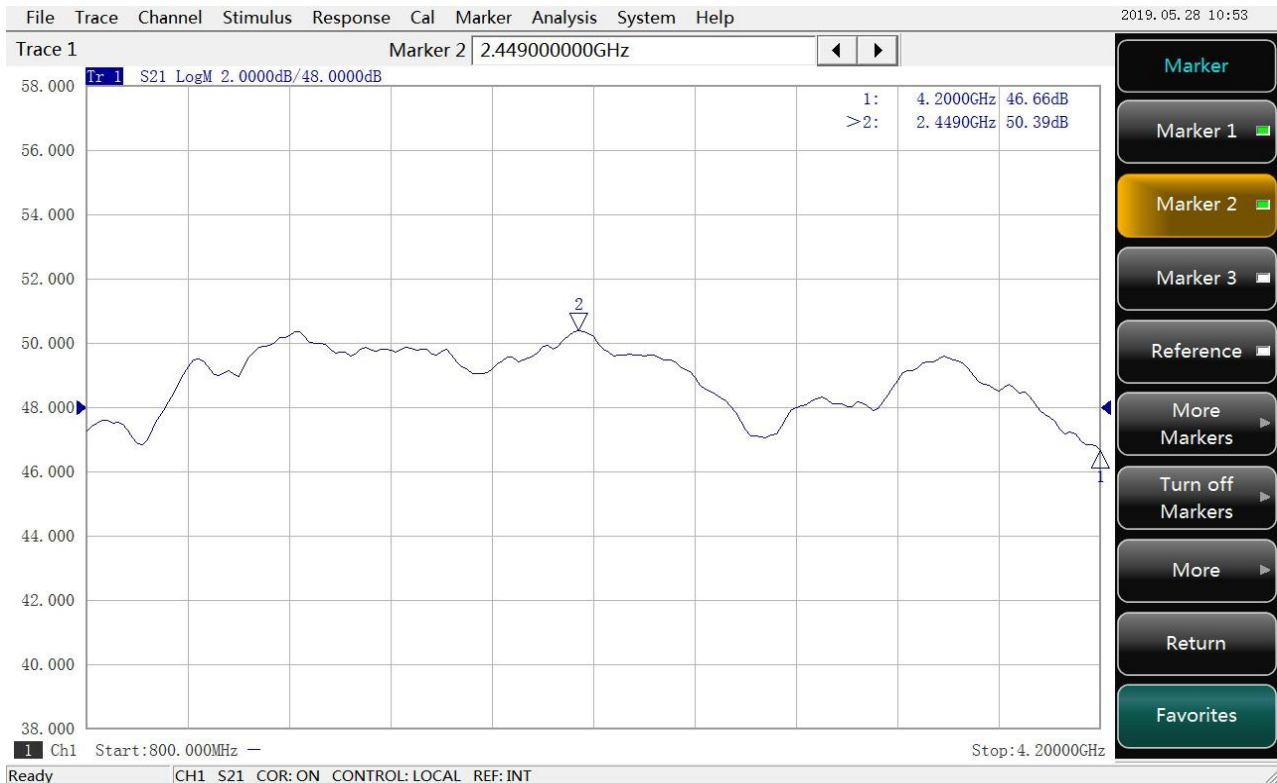

Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

800-4200MHz/50Watt/Module

Model Number: KB0842M47A

Input Return Loss:

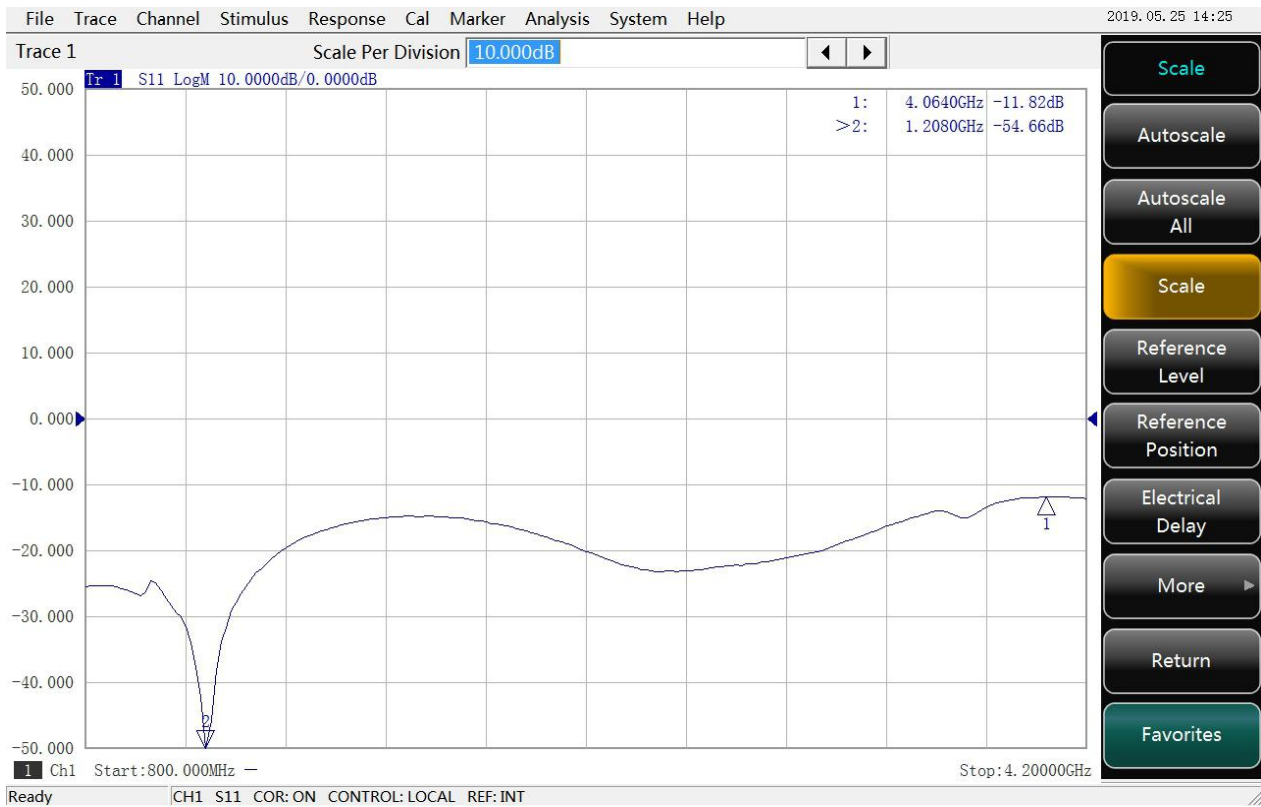

Note: Adequate heatsink required.

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice