

2000-6000MHz/50Watt/Module

Model Number: KB2060M47A

The model KB2060M47A is a multi-octave high power amplifier operating between 2000 MHz and 6000 MHz and offering a wide dynamic Range with 50 Watts typical saturated power. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. Long term reliability and high efficiency . It is ideal for broadband high power S/C Band applications.

FEATURES:

- Broadband & High power;
- High Efficiency;
- Great Linearity;
- Small Size & Light Weight;
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +30.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2000		6000	MHz
RF Output Power	P _{out}		50		Watt
Power Gain	G _p		47		dB
Power Gain Flatness	Δ G _p		±3		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @40W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switch On/Off@10-90% Time	TON/OFF		2	5	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	28	30	32	Volt
DC Current @40W	IDD		9		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	160x100x25 [6.2x3.9x0.98]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	Hybrid, D-Sub 7-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ P _{OUT} =30W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice


2000-6000MHz/50Watt/Module

Model Number: KB2060M47A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	30V _{DC}
A2	GND	Ground
1	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
4	NC	No electrical connection
5	GND	Ground

OUTLINE DRAWING (All dimensions in mm [inch])

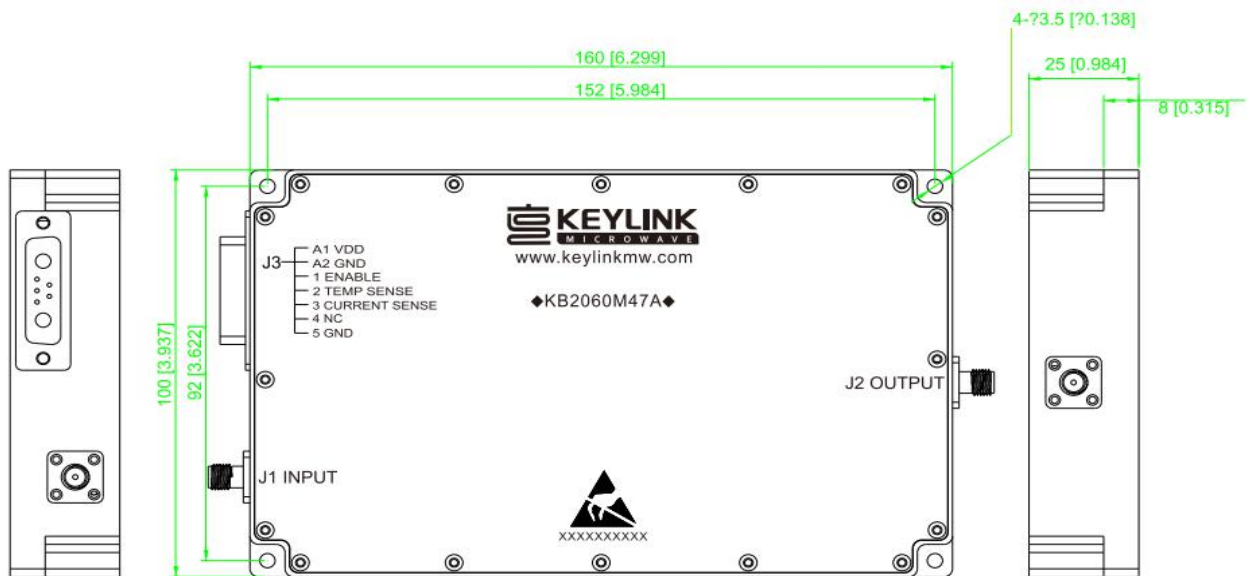

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com


Specifications subject to change without notice

2000-6000MHz/50Watt/Module


Model Number: KB2060M47A

TYPICAL PERFORMANCE PLOTS(For reference only)

Graph1: Output Power (Low temp. $-20\pm 3^{\circ}\text{C}$)

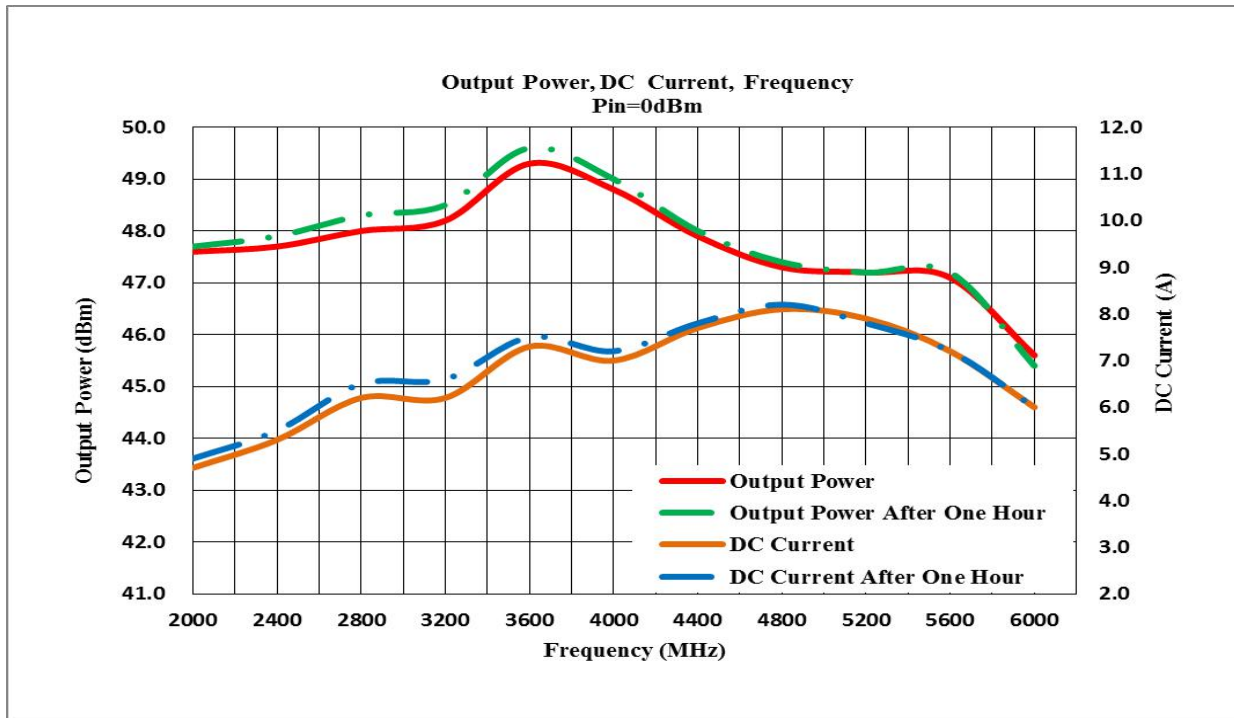

Graph2: Output Power (High temp. $+60\pm 3^{\circ}\text{C}$)

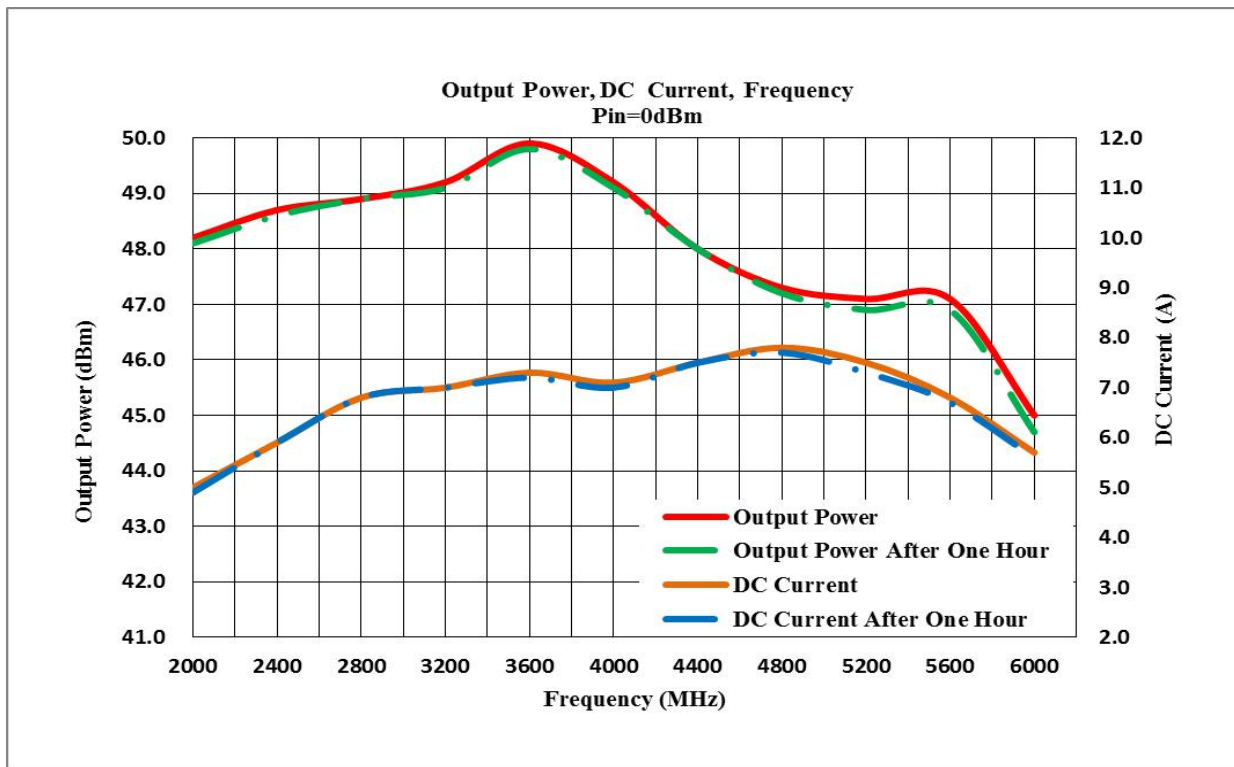

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice


2000-6000MHz/50Watt/Module

Model Number: KB2060M47A

Graph3: Output Power (Normal temp. +25±3 °C)

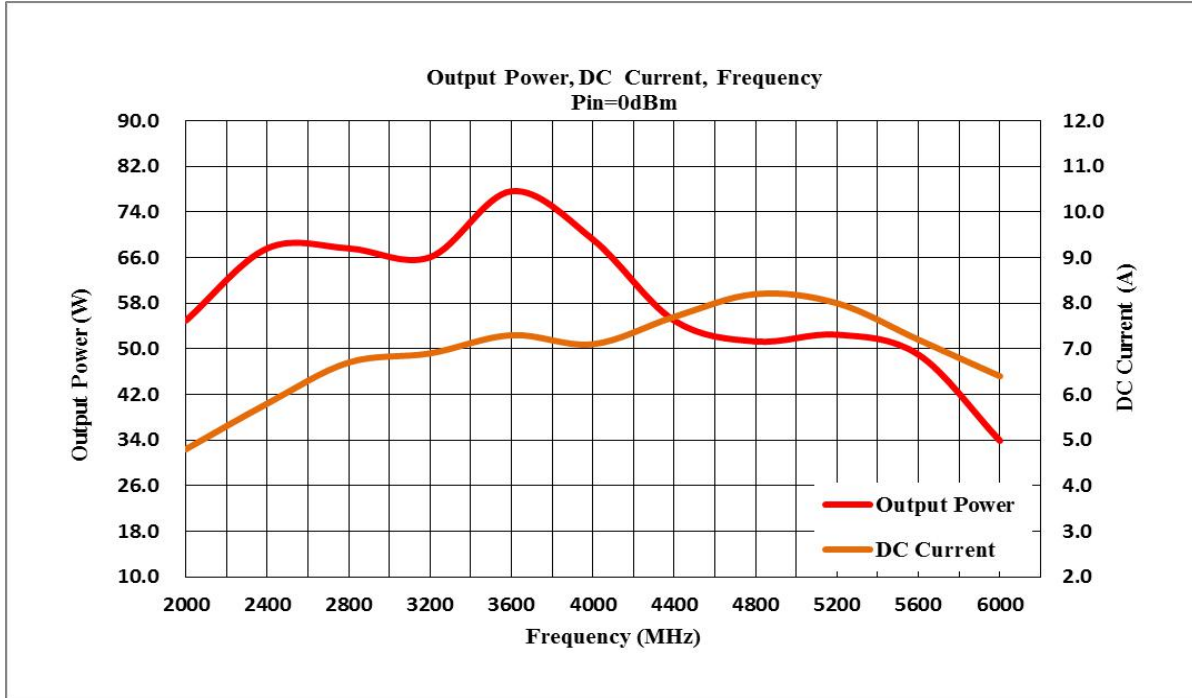

Power Gain:

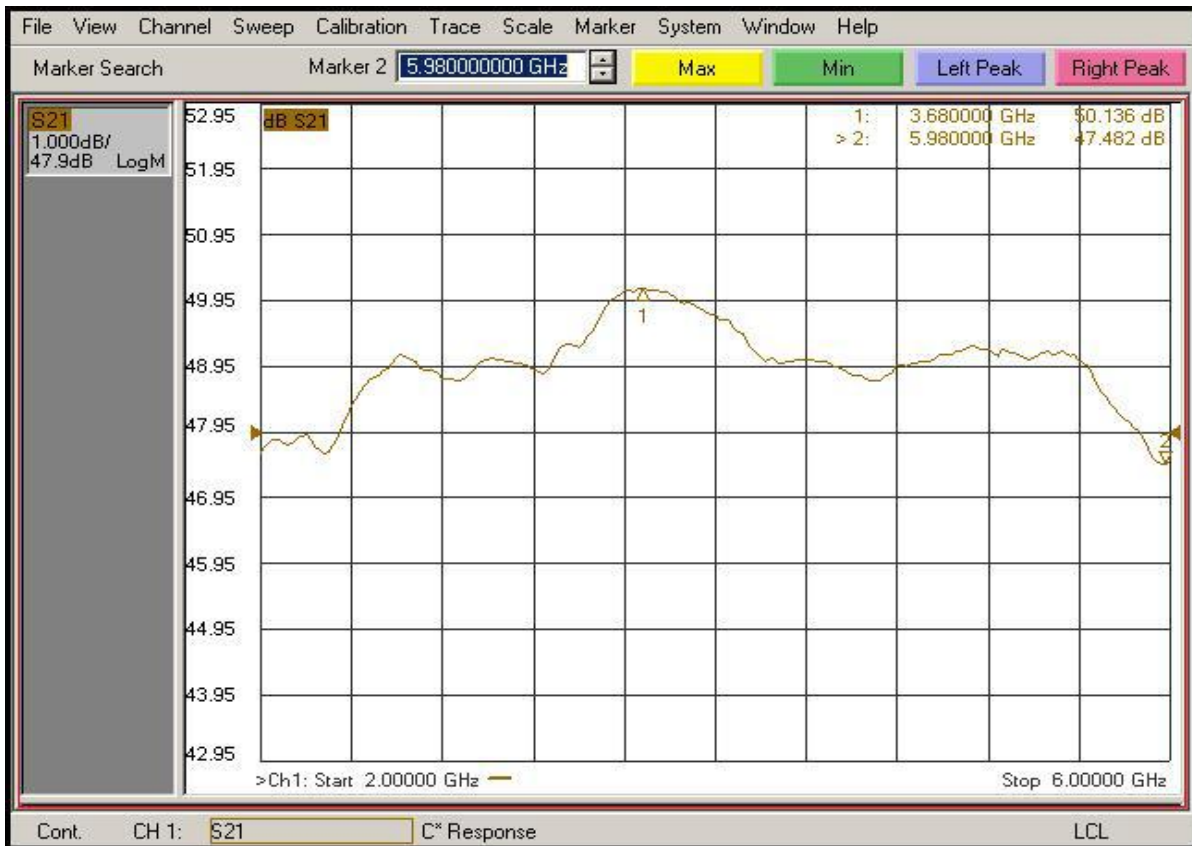

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice

2000-6000MHz/50Watt/Module

Model Number: KB2060M47A

Input Return Loss:



Note:Adequate heatsink required.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice