

**2.7-3.1GHz/2000Watt/Module**

Model: KNP2900M63A

KNP2900M63A is an S-band high power pulsed amplifier operating in the 2.7GHz-3.1GHz frequency range and offering pulse width up to 10μs with duty cycle up to 10%. The amplifier provides 2000 Watts peak output power into a 50 Ohm load. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for high power pulse applications or radar system.

**FEATURES:**

- Small size and light weight
- Power added efficiency > 15%
- Pulse width&duty cycle protection
- Over voltage&over current protection

**ELECTRICAL SPECIFICATIONS @ +50.0VDC, 25°C, 10μS, 10%, 50Ω**

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	2.7		3.1	GHz
RF Output Power	PPK		2000		Watt
Duty Cycle	Duty Cycle			10	%
Pulse Width	PWIDTH	0.5		10	μS
PRI	PRI	50		1000	μS
Harmonics @ Pout = 1000W	H		-30		dBc
Spurious Signals	Spur		-55		dBc
RF Input Power @ Pout = 2000W	PIN		0		dBm
Input Return Loss	S11		-10		dB
Rise /Fall time (Pulse Performance)(10-90%)	TRISE/FALL		100		nS
Switching Speed	TON/OFF		2		μS
Power droop	Droop		1		dB
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	48	50	52	Volt
Peak Current Consumption @ Pout =2000W	IDD			120	Amp
Average Current Consumption @ Pout = 2000W	IDD		25		Amp

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Notes
Dimensions	300x280x30 [11.81x11.02x1.18]	mm [inch]	Max
Weight	6 [13.2]	kg [lb]	Max
RF Connector Input	SMA, Female		
RF Connector Output	Type-N, Female		
DC Interface Connector	Hybrid, D-Sub 7-Pin, Male		
Cooling	External Heatsink Required (Optional supplying)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

**Focus on Your Application**
**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

&gt;&gt; 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

&gt;&gt; Phone: +86(28)87870761\*8708 &gt;&gt; Fax: +86(28)87883266

&gt;&gt; Email: sales@keylinkmw.com &gt;&gt; www.keylinkmw.com

Specifications subject to change without notice

2.7-3.1GHz/2000Watt/Module

Model: KNP2900M63A

ABSOLUTE MAXIMUM RATING


Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =500W	∞ @ all load phase & amplitude for duration of 1minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	GND	Ground
A2	VDD	50VDC
1	NC	No Connection
2	CURRENT SENSE	Analog voltage relative to IDD @ 100mV±10% per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 0.5V+10 mV/°C
4	RF ON/OFF	RF On: TTL Logic High (3.3V)
5	Enable	Amplifier Enable: TTL Logic High (Internally Pulled-Low)

\*The temperature sense accuracy is ±10°C

OUTLINE DRAWING (All dimensions in mm [inch])

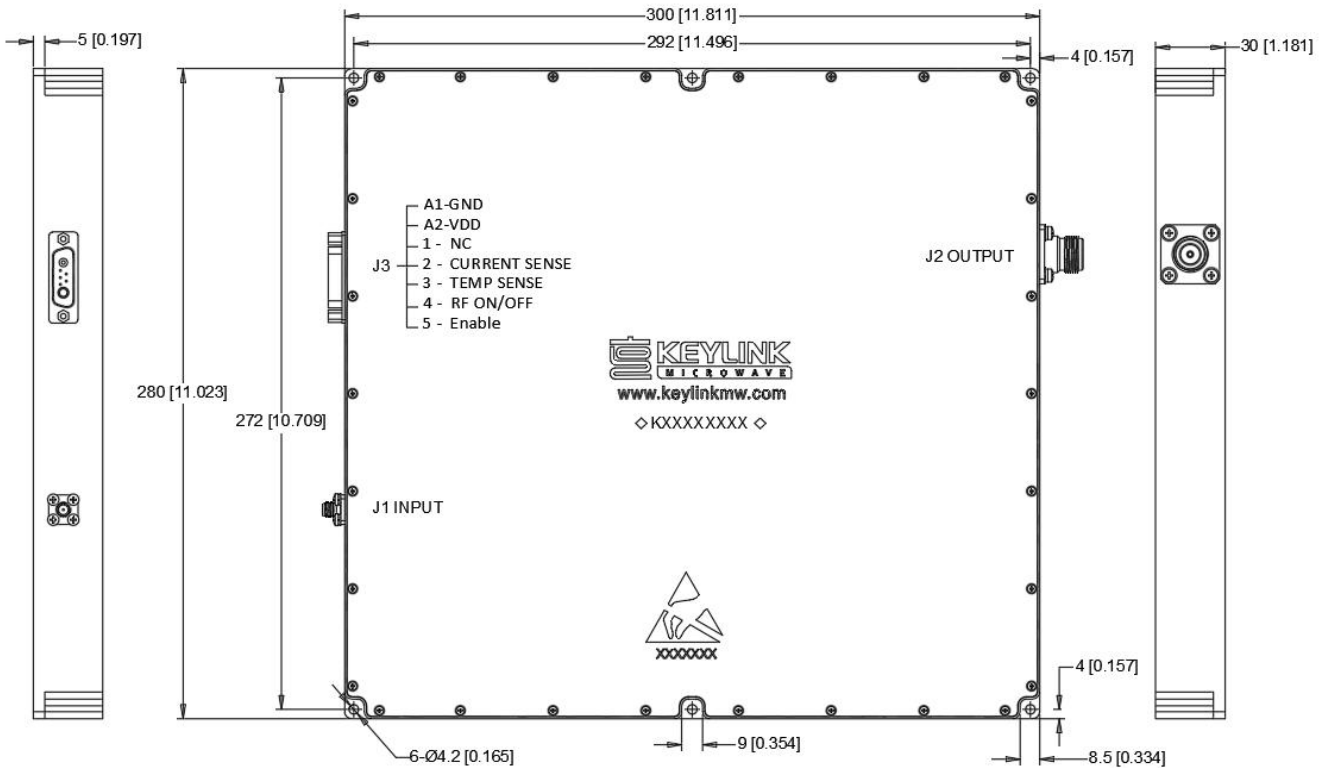

Focus on Your Application

\*Chengdu KeyLink Wireless Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

2.7-3.1GHz/2000Watt/Module

Model: KNP2900M63A

TYPICAL PERFORMANCE PLOTS (For Reference Only)

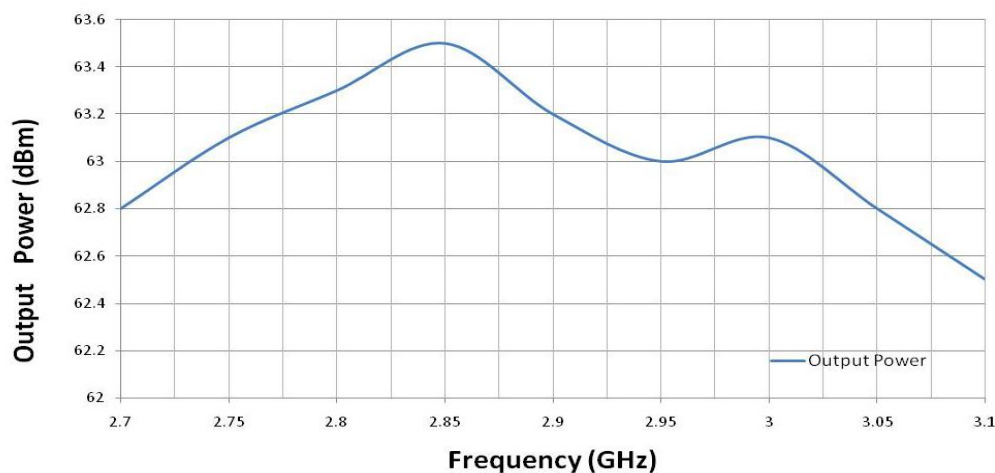

Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any questions.

*Focus on Your Application*

**\*Chengdu KeyLink Wireless Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*