

1.57-1.62GHz/150Watt/Module

Model Number: KN1600M52B

The model KN1600M52B is a multi-octave high power amplifier operating between 1.57GHz and 1.62GHz and offering a wide dynamic Range with 150 Watts typical saturated power. The employment of gallium nitride (LDMOS) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Narrowband & High power;
- High Efficiency;
- Great Linearity;
- Small Size & Light Weight;
- Low Distortion

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	1.57		1.62	GHz
RF Output Power P1	P1		150		Watt
Power Gain	Gp		53		dB
Power Gain Flatness	Δ Gp		±0.75		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @150W	H		-20		dBc
Spurious Signals	Spur		-60	-55	dBc
In/Output Impedance			50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @150W	I _{DD}		23		Amp
Switching Time @1kHz TTL	T _{on/off}			2	uSec
Current Consumption @ Shutdown	I _{SD}		0.1		Amp
RF Input to Output Isolation(During OFF State)	Isolation		70		dBc

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	170x130x30 [6.69x5.12x1.18]	mm [inch]	Maximum
Weight	2 [4.4]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	Type-N, Female		
DC Interface Connector	Hybrid,D-sub 7 Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without	+5 dBm (Max)
Load VSWR @ P _{OUT} =150W	∞ @ all load phase & amplitude for duration of 30 minute; 3:1 @ all load phase & amplitude continuous
Thermal Overload	85°C @ heatsink [restored @ 60°C]

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


1.57-1.62GHz/150Watt/Module

Model Number: KN1600M52B

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28V _{DC}
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT SENSE	Analog voltage relative to I _{DD} @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	FORWARD MONITOR	Analog voltage relative to forward power level
5	REVERSE MONITOR	Analog voltage relative to reflected power level

OUTLINE DRAWING(All dimensions in mm [inch])

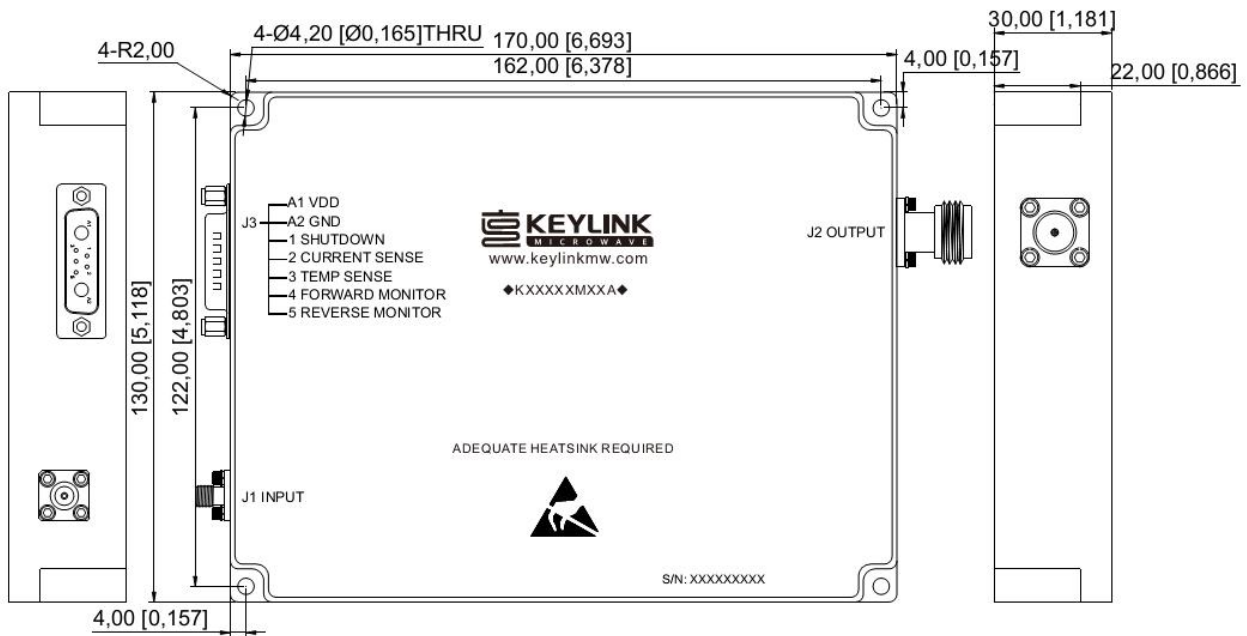

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

1.57-1.62GHz/150Watt/Module

Model Number: KN1600M52B

TYPICAL PERFORMANCE PLOTS (For reference only)

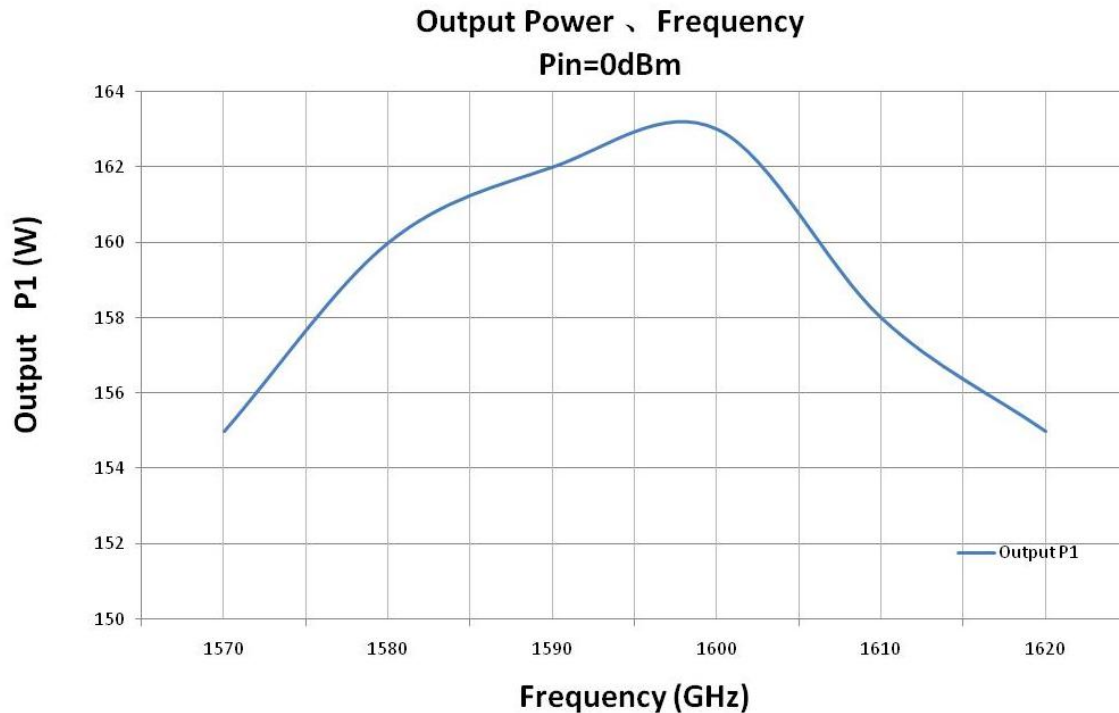

Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice