

500-1000MHz/50Watt/Module

Model Number: KB0510M47A

The KB0510M47A is suitable for broadband high power RF, UHF linear applications. This compact module utilizes advanced high power devices that provide excellent power density, high efficiency, wide dynamic range and low distortions. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components.

FEATURES:

- Small Size and Light Weight
- Broadband and High Power
- 50 Ohms Input and Output Matched
- Built-in Control and Protection Circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	500		1000	MHz
RF Output Power	P _{out}		50		Watt
Power Gain	G		47		dB
Power Gain Flatness	Δ G		±1.5		dB
Input Return Loss	S ₁₁			-15	dB
Harmonics @25W	H		-15		dBc
Spurious Signals	Spur		-60		dBc
Switch On/Off @10-90% Time	Ton\off		1	2	uS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V _{DC}	26	28	30	Volt
DC Current @50W	I _{DD}		7		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	150x90x25 [5.9x3.55x0.98]	mm[inch]	Maximum
Weight	0.75 [1.65]	Kg[lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		65	°C	Storag
Relative Humidity (non-condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+10 dBm	Maximum
Load VSWR @ POUT =50W	∞ @ all load phase & amplitude for duration of 30 minute; 3:1 @ all load phase & amplitude continuous	
Thermal Overload	85°C shutdown	Maximum

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice


500-1000MHz/50Watt/Module

Model Number: KB0510M47A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT MONITOR	Analog voltage relative to IDD @ 100mV per Ampere
4	VDD	28V _{DC}
5	VDD	28V _{DC}
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	VDD	28V _{DC}

OUTLINE DRAWING(All dimensions in mm[inch])

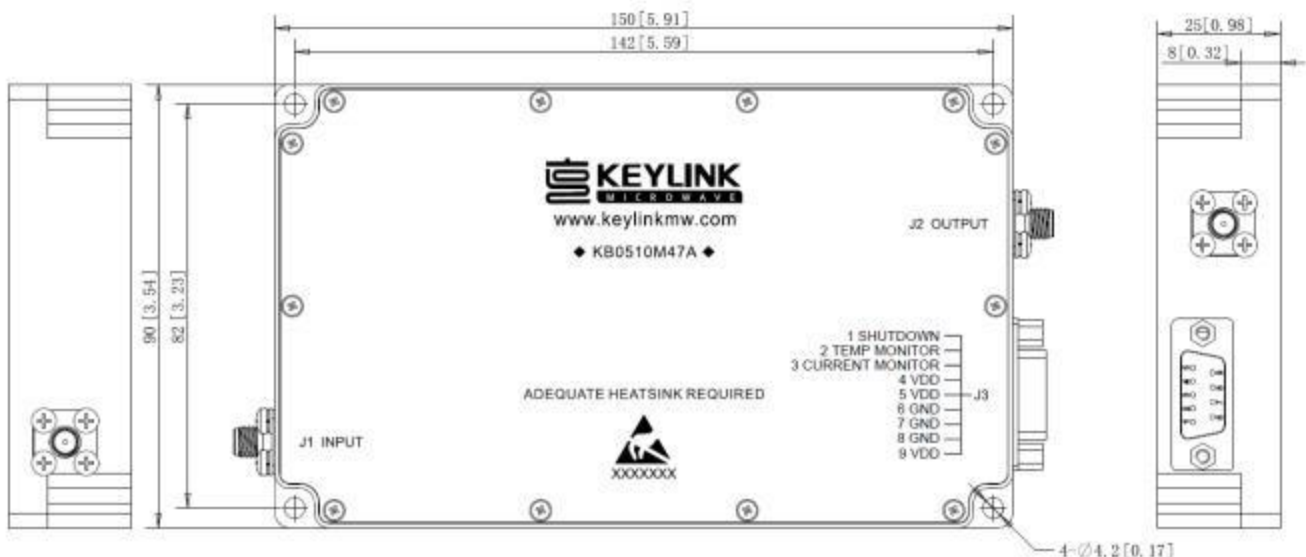

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

500-1000MHz/50Watt/Module

Model Number: KB0510M47A

TYPICAL PERFORMANCE PLOTS(ONLY FOR REFERNECE)

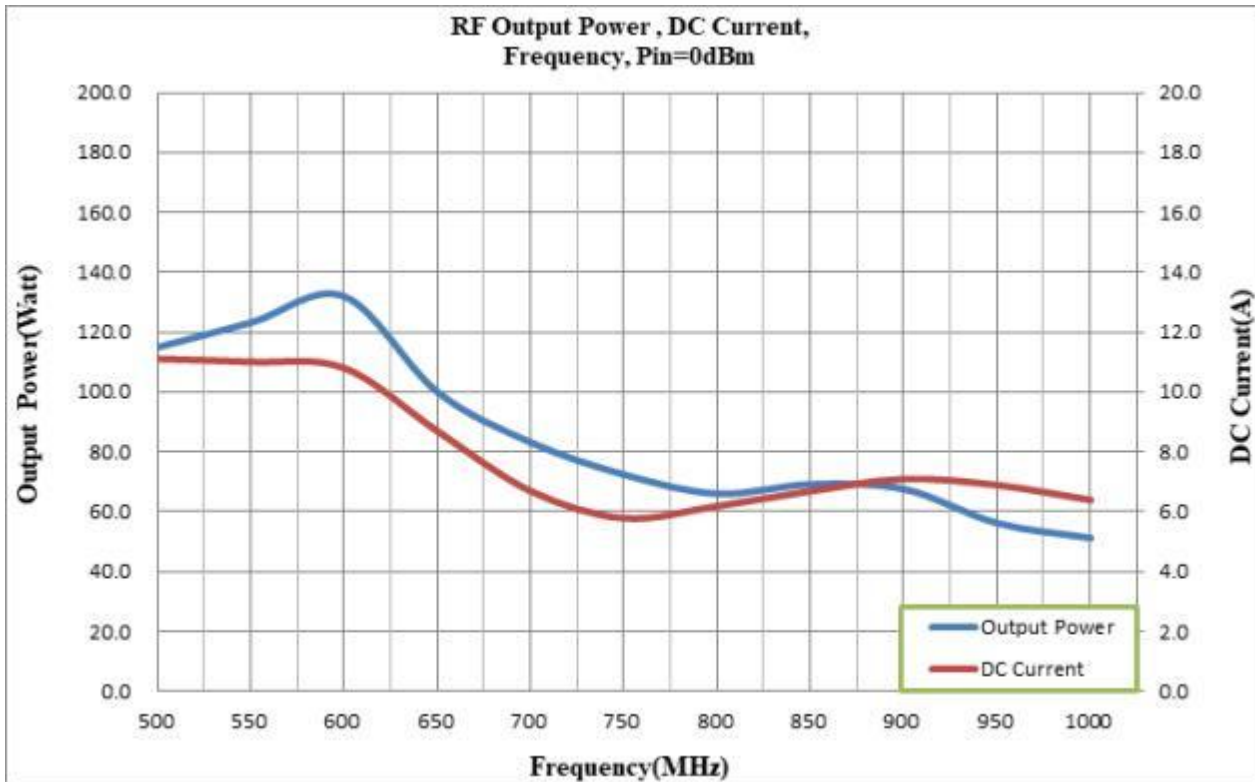

Note: Adequate heatsink required.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice